

Minilinea A - Dark - UGR<19

Lamp available in the recessed or linear suspended version for direct lighting. Its design is at once neutral and sophisticated, reproducing elegant effects in space. Applications include offices, individual worktops and home interiors. Housing: in extruded aluminium.


Version with dark light louvre: double parabolic louvres, in high-gloss 99.99 aluminium, anti-glare and anti-iridescence, very low luminance with PVD treatment or in double parabolic louvres.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

Power factor: >0,95

Luminous flux maintenance: 80% 50000h (L80B20)

Photobiological safety class: exempt group EN62471.

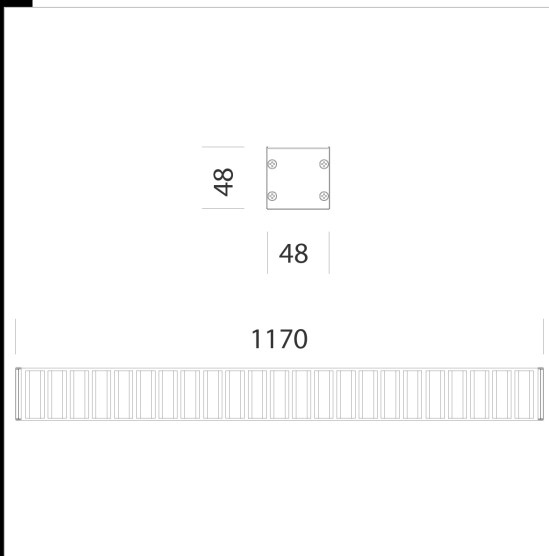

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010774-00	CLD CELL	2,15	LED COB-2711lm-4000K-CRI 80	27 W	OXIDIZED

Accessori



- Ceiling suspension



- Bracket - Liset IP65



- Suspension mount - Lisep IP65



- Ceiling connection - Liset IP65



- Adjustable Bracket - Liset IP65



Download

DXF 2D
- minidark.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated