


Minilinea B - LED

Lamp available in the recessed or linear suspended version for direct lighting. Its design is at once neutral and sophisticated, reproducing elegant effects in space. Applications include offices, individual worktops and home interiors. Housing: in extruded aluminium. Diffuser: made of polycarbonate with a prismatic structure. Equipment: supplied with suspension accessories (steel wires and ceiling roses). Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards. Power factor: >0,95 Luminous flux maintenance 70% 50000h (L70B50) Photobiological safety class: exempt group EN62471.

Download

- DXF 2D
- minilinea b.dxf
- Montaggi
- MINILINEA_B_LED rev4.pdf

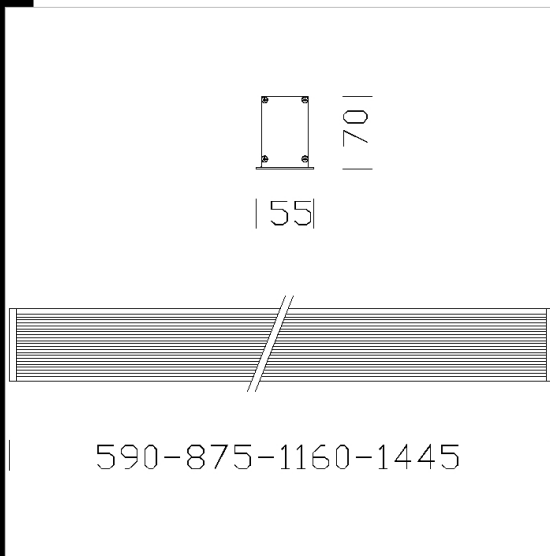

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010870-00	CLD CELL	1.45	LED-1085lm-4000K-CRI 80	14 W	OXIDIZED
22010870-12	CLD CELL-D	1.45	LED-1085lm-4000K-CRI 80	14 W	OXIDIZED
22010870-1241	CLD CELL-D-D	1.41	LED-1085lm-4000K-CRI 80	14 W	OXIDIZED
22010870-09	CLD CELL-E	0.00	LED-1085lm-4000K-CRI 80	14 W	OXIDIZED
22010870-31	CLD CELL-E	0.00	LED-1085lm-4000K-CRI 80	14 W	OXIDIZED
22010870-39	CLD CELL	1.34	LED-1010lm-3000K-CRI 80	14 W	OXIDIZED
22010870-1228	CLD CELL-D	0.00	LED-1010lm-3000K-CRI 80	14 W	OXIDIZED
22010870-3941	CLD CELL-D-D	0.00	LED-1010lm-3000K-CRI 80	14 W	OXIDIZED
22010870-0928	CLD CELL-E	0.00	LED-1010lm-3000K-CRI 80	14 W	OXIDIZED
22010870-3957	CLD CELL-E	0.00	LED-1010lm-3000K-CRI 80	14 W	OXIDIZED
22010871-00	CLD CELL	1.20	LED-1626lm-4000K-CRI 80	21 W	OXIDIZED
22010871-12	CLD CELL-D	1.88	LED-1626lm-4000K-CRI 80	20 W	OXIDIZED
22010871-1241	CLD CELL-D-D	1.70	LED-1626lm-4000K-CRI 80	21 W	OXIDIZED
22010871-09	CLD CELL-E	0.00	LED-1626lm-4000K-CRI 80	21 W	OXIDIZED
22010871-31	CLD CELL-E	0.00	LED-1626lm-4000K-CRI 80	21 W	OXIDIZED
22010871-39	CLD CELL	1.80	LED-1512lm-3000K-CRI 80	21 W	OXIDIZED
22010871-1228	CLD CELL-D	1.73	LED-1512lm-3000K-CRI 80	21 W	OXIDIZED
22010871-3941	CLD CELL-D-D	1.41	LED-1512lm-3000K-CRI 80	21 W	OXIDIZED
22010871-0928	CLD CELL-E	0.00	LED-1512lm-3000K-CRI 80	21 W	OXIDIZED
22010871-3957	CLD CELL-E	0.00	LED-1512lm-3000K-CRI 80	21 W	OXIDIZED
22010872-00	CLD CELL	2.30	LED-2169lm-4000K-CRI 80	27 W	OXIDIZED
22010872-12	CLD CELL-D	2.23	LED-2169lm-4000K-CRI 80	27 W	OXIDIZED
22010872-1241	CLD CELL-D-D	2.20	LED-2169lm-4000K-CRI 80	27 W	OXIDIZED
22010872-09	CLD CELL-E	2.67	LED-2169lm-4000K-CRI 80	27 W	OXIDIZED
22010872-31	CLD CELL-E	0.00	LED-2169lm-4000K-CRI 80	27 W	OXIDIZED
22010872-39	CLD CELL	2.30	LED-2017lm-3000K-CRI 80	29 W	OXIDIZED
22010872-1228	CLD CELL-D	2.30	LED-2017lm-3000K-CRI 80	29 W	OXIDIZED
22010872-3941	CLD CELL-D-D	2.01	LED-2017lm-3000K-CRI 80	27 W	OXIDIZED
22010872-0928	CLD CELL-E	0.00	LED-2017lm-3000K-CRI 80	27 W	OXIDIZED
22010872-3957	CLD CELL-E	0.00	LED-2017lm-3000K-CRI 80	27 W	OXIDIZED
22010873-00	CLD CELL	2.50	LED-2710lm-4000K-CRI 80	34 W	OXIDIZED
22010873-12	CLD CELL-D	2.70	LED-2710lm-4000K-CRI 80	34 W	OXIDIZED

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Minilinea B - LED

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010873-1241	CLD CELL-D-D	0.97	LED-2710lm-4000K-CRI 80	34 W	OXIDIZED
22010873-09	CLD CELL-E	3.06	LED-2710lm-4000K-CRI 80	34 W	OXIDIZED
22010873-31	CLD CELL-E	0.00	LED-2710lm-4000K-CRI 80	34 W	OXIDIZED
22010873-39	CLD CELL	2.50	LED-2520lm-3000K-CRI 80	36 W	OXIDIZED
22010873-1228	CLD CELL-D	2.69	LED-2520lm-3000K-CRI 80	35 W	OXIDIZED
22010873-3941	CLD CELL-D-D	2.39	LED-2520lm-3000K-CRI 80	34 W	OXIDIZED
22010873-0928	CLD CELL-E	0.00	LED-2520lm-3000K-CRI 80	34 W	OXIDIZED
22010873-3957	CLD CELL-E	0.00	LED-2520lm-3000K-CRI 80	34 W	OXIDIZED

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated