


Download

DXF 2D
- 22011610.dxf
Montaggi
- SINTESI-Spot rev1.pdf



Sintesi Spot - UGR<22 - light module

In extruded aluminium complete with connecting bracket. It allows the mechanical alignment of profiles. A lighting module complete with reflector in high-performance metallic V0 polycarbonate with micro faceting.

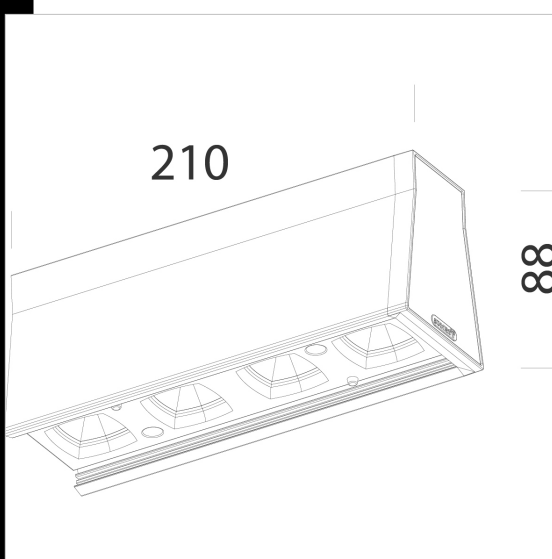

Code	Gear	Kg	Lumen-K-CRI	WTot	Colour
22011610-00	CLD	1,00	LED-4320lm-4000K-CRI 80	32 W	WHITE

Prodotti

	- Sintesi System - ceiling - wide-		- Sintesi System - suspension		- Sintesi System - ceiling - with		- Sintesi System - suspension -
	- Sintesi System - suspension direct/indirect - with UGR<19 shield		- Sintesi System - ceiling - Dark light - UGR<19		- Sintesi System - suspension - Dark light - UGR<19		- Sintesi System - suspension direct/indirect light - Dark light - UGR<19
	- Sintesi System - ceiling with matt shield - UGR<22		- Sintesi System - suspension with matt shield - UGR<22		- Sintesi System - suspension direct/indirect light - with matt shield - UGR<22		- Sintesi System - ceiling 25° asymmetric - UGR<22
	- Sintesi System - ceiling 25° asymmetric - UGR<22		- Sintesi System - suspension direct/indirect light - 60° wide-beam - UGR<22		- Sintesi System - suspension - wide-beam		

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated