


Liset MidPower darklight - suspension

Housing: made of extruded and oxidized aluminium.
 Louvre: Dark light Dark light double parabolic louvres, in high-gloss plated aluminium 99.99. Anti-dazzle and anti-iridescence, very low luminance. PVD treatment.
 UGR<19 glare index: compliant with applicable standards * (reflection coefficient: ceiling 0.7 - walls 0.5)
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.
 Power factor: >0,95 Luminous flux maintenance 80%: 50.000h (L80B20).
 Photobiological safety class: exempt group EN62471.

Download

- DXF 2D
- midpowersosp1.dxf
- Montaggi
- LISET_MIDPOWER Rev3.pdf

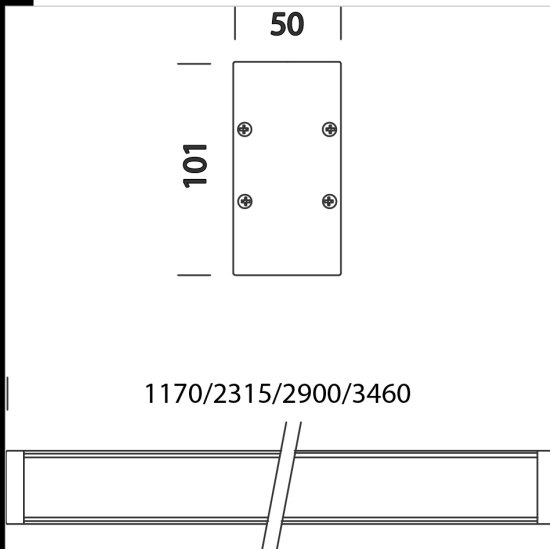

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22012814-12	CLD CELL-D	2.70	LED 4 Modules-2711lm-3000K-CRI 80	27 W	WHITE
22012818-12	CLD CELL-D	6.56	LED 8 Modules-5423lm-3000K-CRI 80	55 W	WHITE
22012810-12	CLD CELL-D	7.35	LED 10 Modules-6776lm-3000K-CRI 80	69 W	WHITE
22012812-12	CLD CELL-D	8.00	LED 12 Modules-8138lm-3000K-CRI 80	79 W	WHITE

Accessories



- Ceiling suspension



- Suspension wire



- Alignment brackets - Liset



- Angle joint - Liset midpower

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated