



### Download

DXF 2D  
- midpowersosp2.dxf

Montaggi  
- LISET\_MIDPOWER Rev3.pdf




## Liset MidPower darklight - suspension - direct and indirect light

Housing: made of oxidized extruded aluminium.

Diffuser: Dark light

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

80%: 50.000h (L80B20).

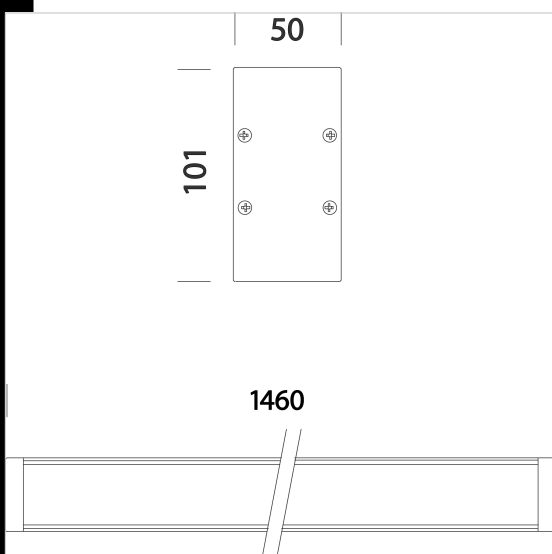

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22012811-00	CLD CELL	3.99	LED 3-5 modules-5352lm-4000K-CRI 80	55 W	WHITE
22012811-1241	CLD CELL-D-D	3.64	LED 3-5 modules-5352lm-4000K-CRI 80	54 W	WHITE
22012811-39	CLD CELL	3.61	LED 3-5 modules-4977lm-3000K-CRI 80	55 W	WHITE
22012811-3941	CLD CELL-D-D	3.71	LED 3-5 modules-4977lm-3000K-CRI 80	54 W	WHITE

### Accessories



- Ceiling suspension



- Ceiling suspension



- Powered suspension 3-5 p



- Alignment brackets - Liset



- Angle joint - Liset midpower

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated