


Liset MidPower darklight - Ceiling

Housing: made of extruded and oxidized aluminium.
 Louvre: Dark light Dark light double parabolic louvres, in high-gloss plated aluminium 99.99. Anti-dazzle and anti-iridescence, very low luminance. PVD treatment.
 UGR<19 glare index: compliant with applicable standards * (reflection coefficient: ceiling 0.7 - walls 0.5)
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.
 Power factor: >0,95 Luminous flux maintenance 80%: 50.000h (L80B20).
 Photobiological safety class: exempt group EN62471.

Download

- DXF 2D
- midpowerplaf1.dxf
- Montaggi
- LISET_MIDPOWER Rev3.pdf

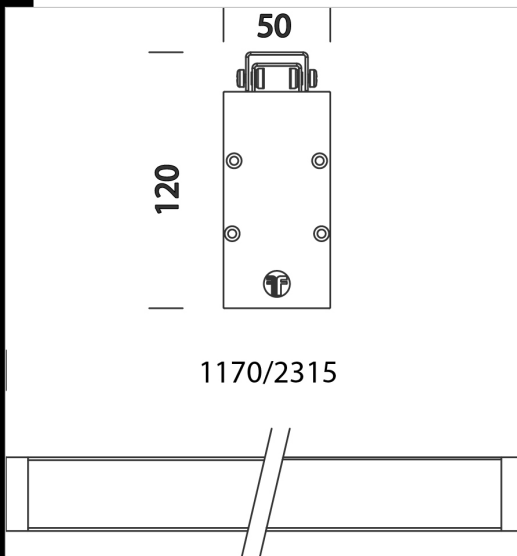

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22012911-00	CLD CELL	3.17	LED 4 Modules-2535lm-4000K-CRI 80	27 W	WHITE
22012911-1241	CLD CELL-D-D	3.16	LED 4 modules-2717lm-4000K-CRI 80	27 W	WHITE
22012911-09	CLD CELL-E	0.00	LED 4 modules-2717lm-4000K-CRI 80	28 W	WHITE
22012911-94	CLD CELL-D-E	3.69	LED 4 Modules-2535lm-4000K-CRI 80	27 W	WHITE
22012911-9441	CLD CELL-D-D-E	0.00	LED 4 Modules-2717lm-4000K-CRI 80	28 W	WHITE
22012911-39	CLD CELL	0.00	LED 4 modules-2521lm-3000K-CRI 80	28 W	WHITE
22012911-3941	CLD CELL-D-D	0.00	LED 4 modules-2521lm-3000K-CRI 80	28 W	WHITE
22012913-00	CLD CELL	5.70	LED 8 Modules-5070lm-4000K-CRI 80	55 W	WHITE
22012911-0928	CLD CELL-E	0.00	LED 4 modules-2521lm-3000K-CRI 80	28 W	WHITE
22012913-1241	CLD CELL-D-D	5.58	LED 8 modules-5423lm-4000K-CRI 80	55 W	WHITE
22012913-09	CLD CELL-E	0.00	LED 8 modules-5423lm-4000K-CRI 80	55 W	WHITE
22012913-94	CLD CELL-D-E	6.24	LED 8 Modules-5070lm-4000K-CRI 80	55 W	WHITE
22012913-9441	CLD CELL-D-D-E	0.00	LED 8 modules-5423lm-4000K-CRI 80	55 W	WHITE
22012913-31	CLD CELL-E	0.00	LED 8 modules-5423lm-4000K-CRI 80	55 W	WHITE
22012913-39	CLD CELL	0.00	LED 8 modules-5043lm-3000K-CRI 80	55 W	WHITE
22012913-3941	CLD CELL-D-D	0.00	LED 8 modules-5043lm-3000K-CRI 80	55 W	WHITE
22012913-0928	CLD CELL-E	0.00	LED 8 modules-5043lm-3000K-CRI 80	55 W	WHITE
22012913-3957	CLD CELL-E	0.00	LED 8 modules-5043lm-3000K-CRI 80	55 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated