


## Liset MidPower darklight - Wall



Housing: made of extruded and oxidized aluminium.  
 Louvre: Dark light Dark light double parabolic louvres, in high-gloss plated aluminium 99.99. Anti-dazzle and anti-iridescence, very low luminance. PVD treatment.  
 UGR<19 glare index: compliant with applicable standards \* (reflection coefficient: ceiling 0.7 - walls 0.5)  
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.  
 Power factor: >0,95 Luminous flux maintenance 80%: 50.000h (L80B20).  
 Photobiological safety class: exempt group EN62471.

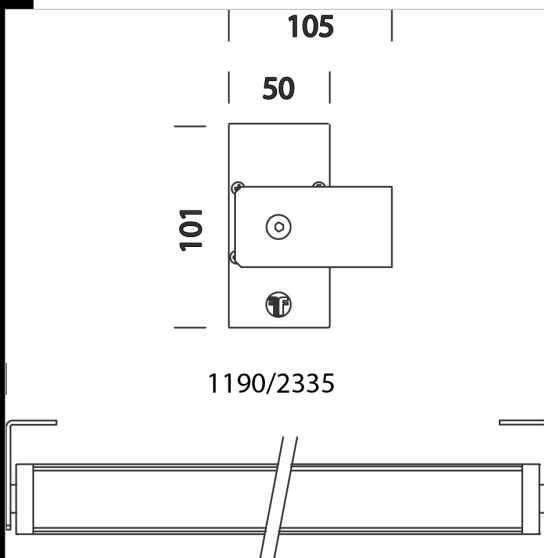

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22012914-12	CLD CELL-D	3.10	LED 4 Modules-2711lm-3000K-CRI 80	27 W	WHITE
22012918-12	CLD CELL-D	5.00	LED 8 Modules-5423lm-3000K-CRI 80	55 W	WHITE
22012918-1241	CLD CELL-D-D	5.00	LED 8 Modules-5070lm-4000K-CRI 80	55 W	WHITE



**Download**  
 DXF 2D  
 - midpowerpar1.dxf  
 Montaggi  
 - LISET\_MIDPOWER Rev3.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated