


Micro Liset - Cylindric Professional


Housing: painted anodised aluminium body for external installation including stainless steel headpieces and IP65 waterproof connector. Internal diffuser: opal PMMA tube. External diffuser: UV-stabilised and shock-proof clear PMMA tube. LED: Luminous flux maintenance 80%: 50.000h (L80B20)
On request 24V version (620mm-905mm-1190mm-1475mm-3450mm max)

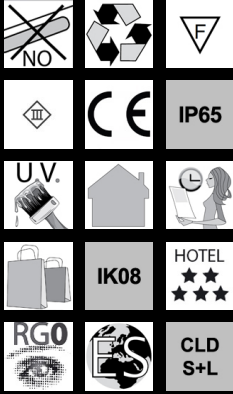

Download

DXF 2D
- microprof.dxf

Montaggi
- MICRO_LISET_CILINDRICA_PRO
rev3.pdf

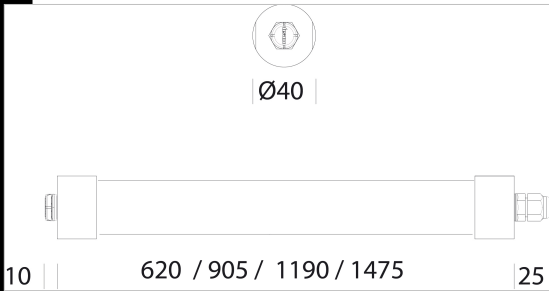

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22013070-00	CLD S+L	0.57	LED-1501lm-3000K-CRI 80	13 W	OXIDIZED
22013070-1241	CLD-D-D	1.04	LED-1501lm-3000K-CRI 80	13 W	OXIDIZED
22013070-68	CLD S+L	0.57	LED-1606lm-4000K-CRI 80	13 W	OXIDIZED
22013070-6841	CLD-D-D	1.09	LED-1606lm-4000K-CRI 80	13 W	OXIDIZED
22013071-00	CLD S+L	0.78	LED-2252lm-3000K-CRI 80	19 W	OXIDIZED
22013071-1241	CLD-D-D	0.78	LED-2252lm-3000K-CRI 80	19 W	OXIDIZED
22013071-68	CLD S+L	0.75	LED-2410lm-4000K-CRI 80	19 W	OXIDIZED
22013071-6841	CLD-D-D	0.78	LED-2410lm-4000K-CRI 80	19 W	OXIDIZED
22013072-00	CLD S+L	0.97	LED-3002lm-3000K-CRI 80	25 W	OXIDIZED
22013072-1241	CLD-D-D	0.97	LED-3002lm-3000K-CRI 80	25 W	OXIDIZED
22013072-68	CLD S+L	0.95	LED-3212lm-4000K-CRI 80	25 W	OXIDIZED
22013072-6841	CLD-D-D	1.50	LED-3212lm-4000K-CRI 80	25 W	OXIDIZED
22013073-00	CLD S+L	1.13	LED-3754lm-3000K-CRI 80	31 W	OXIDIZED
22013073-1241	CLD-D-D	1.13	LED-3754lm-3000K-CRI 80	31 W	OXIDIZED
22013073-68	CLD S+L	1.13	LED-4017lm-4000K-CRI 80	31 W	OXIDIZED
22013073-6841	CLD-D-D	1.13	LED-4017lm-4000K-CRI 80	31 W	OXIDIZED

Accessories



- IP65 box for LED - 700mA



- Ceiling suspension

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated