


Download

DXF 2D
- omnih.dxf



Omnitrack H - Dimm - 6 conductors

Omnitrack H 6 cables: new H-shaped track-mounted spotlight. The lower part can house spotlights for direct lighting, while the upper part can house LED strips or LED modules of various types for indirect lighting.

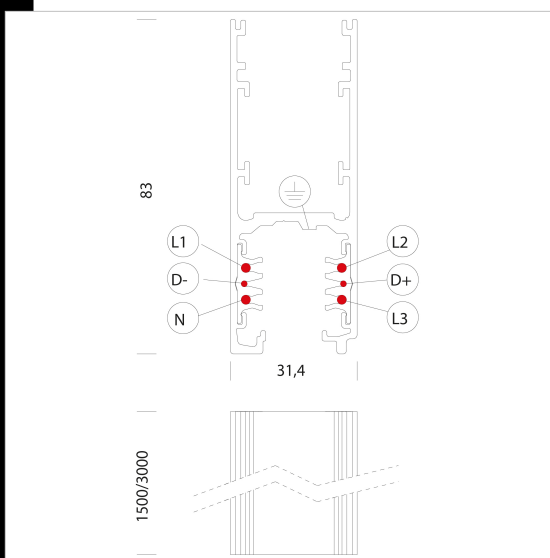

Code	Gear	Kg	WTot	Colour
22013210-00	S	2,36	0 W	WHITE
22013213-00	S	4,74	0 W	WHITE

Accessori



- Ceiling suspension



- Suspension wire



- Suspension mount



- Mechanical adapter



- Ceiling rose for susp. rod



- Ceiling suspension



- T-shaped, external left sided joint H



- Ceiling suspension Q



- Linear joint



- Suspension bracket



- Jointing bracket



- Power supply H - sx



- Linear joint H



- External L-shaped joint H



- Internal L-shaped joint H



- T-shaped, internal right sided joint H



- T-shaped, external right sided joint H



- T-shaped, internal left sided joint H



- Cross joint H



- Power supply H - dx

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated