




Download
DXF 2D
- microlistt.dxf



Micro Liset TT

Housing: complete with aluminium frame with thermoplastic end caps.
Diffuser: made in opal polycarbonate. LED: Luminous flux maintenance L70B50: 50.000h. On request: CRI 90
Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

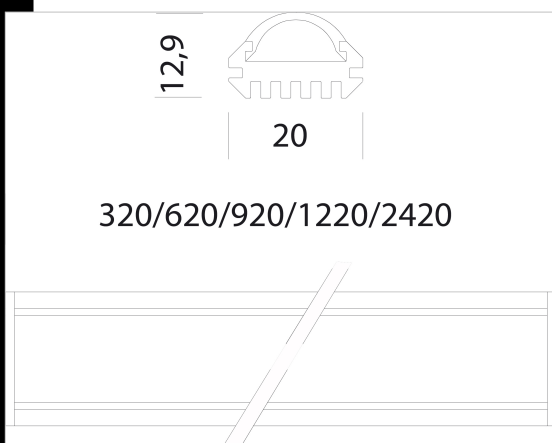

Code	Gear	Kg	Watt	Base	Lamps	Colour
22013870-00	CLD S+L	0,45	LED 84x0,06W		540lm-3000K-CRI 80	OXIDIZEDED
22013970-00	CLD S+L	0,45	LED 84x0,06W		540lm-4000K-CRI 80	OXIDIZEDED
22013871-00	CLD S+L	0,45	LED 168x0,06W		1080lm-3000K-CRI 80	OXIDIZEDED
22013971-00	CLD S+L	0,45	LED 168x0,06W		1080lm-4000K-CRI 80	OXIDIZEDED
22013872-00	CLD S+L	0,45	LED 252x0,06W		1620lm-3000K-CRI 80	OXIDIZEDED
22013972-00	CLD S+L	0,45	LED 252x0,06W		1620lm-4000K-CRI 80	OXIDIZEDED
22013873-00	CLD S+L	0,45	LED 336x0,06W		2160lm-3000K-CRI 80	OXIDIZEDED
22013973-00	CLD S+L	0,45	LED 336x0,06W		2160lm-4000K-CRI 80	OXIDIZEDED
22013874-00	CLD S+L	0,45	LED 672x0,06W		4320lm-3000K-CRI 80	OXIDIZEDED
22013974-00	CLD S+L	0,45	LED 672x0,06W		4320lm-4000K-CRI 80	OXIDIZEDED

Accessories



- Bracket - Microliset



- IP20 Microliset box



- Adjustable Bracket - Microliset



- IP67 LED box - 24V