

Linea LED - carriageable

Housing (formwork): in extruded aluminium with edge for floor, wall and ceiling mounting.

LED: signal light, in polycarbonate and acrylic material with UV treatment, 20 mm pitch.

Download


DXF 2D
- traccia.dxf

3DS

- fosnova_linea_1510.3ds
- fosnova_linea_2010.3ds
- fosnova_linea_1010.3ds
- fosnova_linea_3000.3ds

3DM

- fosnova_linea_1010.3dm
- fosnova_linea_3000.3dm
- fosnova_linea_1510.3dm
- fosnova_linea_2010.3dm

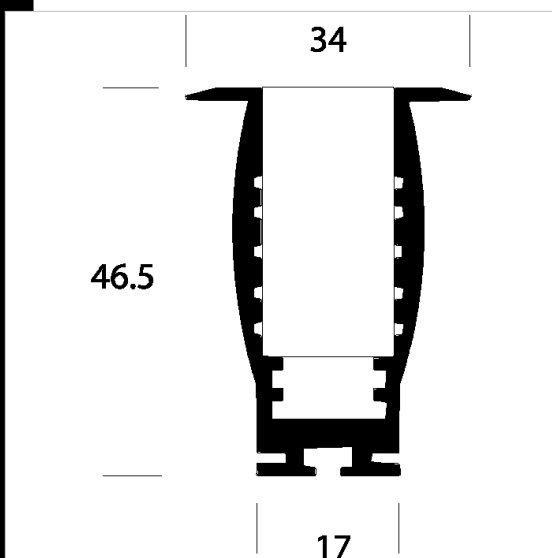

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22014070-00	CLD S+L	1.30	LED 30-342lm-4000K-	3 W	OXIDIZED
22014071-00	CLD S+L	1.54	LED 60-684lm-4000K-	6 W	OXIDIZED
22014072-00	CLD S+L	1.55	LED 90-1026lm-4000K-	9 W	OXIDIZED
22014073-00	CLD S+L	2.05	LED 120-1368lm-4000K-	12 W	OXIDIZED

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated