




Micro Liset - Cylindric

Even at first glance, the design of this fixture allows for maximum freedom. The eyelet that keep the fixture hooked can adjust to any installation angle. Structure in structural anodized aluminium. transparent polycarbonate diffuser, transparent UV treated external tube.

Different possibilities of wall and ceiling fixing, with specific accessories. available in white or RGB LED versions, with two different powers. Led: 3000/4000K - CRI80. Use transformer acc. 22092036/38-00 Power factor: >0,9

Luminous flux maintenance 70% 50000h (L70B50)
Photobiological safety class: exempt group EN62471.

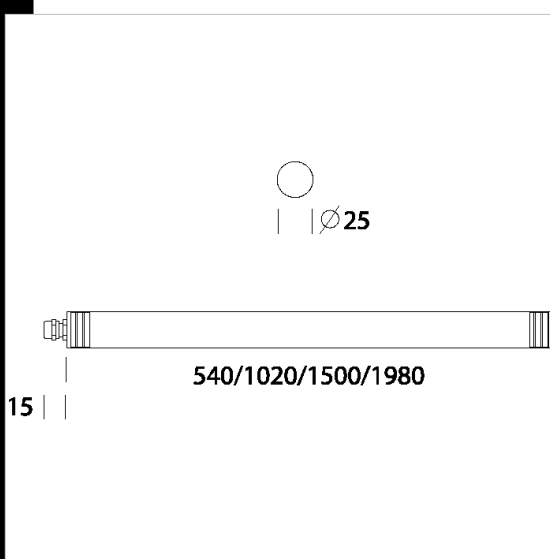

Code	Gear	Kg	Watt	Base	Lamps	Colour
22014370-00	CLD S+L	0,37	LED white 30x0,30W		1100lm-3000K-CRI 85	OXIDIZEDD
22014371-00	CLD S+L	0,62	LED white 60x0,30W		2200lm-3000K-CRI 85	OXIDIZEDD
22014270-00	CLD S+L	0,40	LED white 30x0,30W		1200lm-4000K-CRI 85	OXIDIZEDD
22014372-00	CLD S+L	0,88	LED white 90x0,30W		3300lm-3000K-CRI 85	OXIDIZEDD
22014373-00	CLD S+L	0,23	LED white 120x0,30W		4400lm-3000K-CRI 85	OXIDIZEDD
22014271-00	CLD S+L	0,60	LED white 60x0,30W		2400lm-4000K-CRI 85	OXIDIZEDD
22014272-00	CLD S+L	0,89	LED white 90x0,30W		3600lm-4000K-CRI 85	OXIDIZEDD
22014273-00	CLD S+L	1,13	LED white 120x0,30W		4800lm-4000K-CRI 85	OXIDIZEDD

Accessories



- Wall bracket for cylindrical
Micro Liset

Download

DXF 2D
- microc.dxf