

Download

DXF 2D
- microlis.dxf

Montaggi
- microliset.pdf



Micro Liset HO - 4000K - CRI 80

Led's open up amazing and unexpected lighting possibilities. The Microliset series ensure excellent light flux with a very high colour performance. Long-lasting, reliable fixtures need little maintenance. Excellent versatility, elegant and non-invasive, these luminaires provide perfect lighting without being seen.

Housing: made of oxidized extruded aluminium.

Diffuser: made of clear polycarbonate,


Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Use transformer acc. 22092022-00 (MAX 70W) or 22090839-00 (MAX 20W). DIM 22090840-00

Power factor: >0,95

Luminous flux maintenance 70% 50000h (L70B50)

Photobiological safety class: exempt group EN62471.

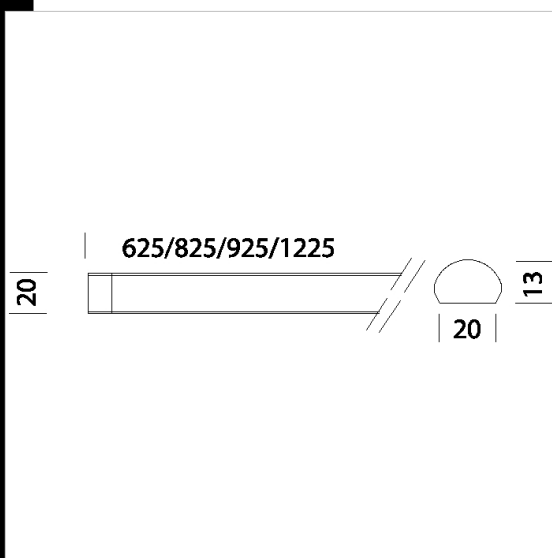

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22014975-00	CLD S+L	0,40	LED-1237lm-4000K-CRI 80	15 W	OXIDIZEDED
22014976-00	CLD S+L	0,25	LED-1237lm-4000K-CRI 80	15 W	OXIDIZEDED
22014973-00	CLD S+L	0,30	LED-618lm-4000K-CRI 80	7 W	OXIDIZEDED
22014978-00	CLD S+L	0,45	LED-2475lm-4000K-CRI 80	30 W	OXIDIZEDED
22014974-00	CLD S+L	0,30	LED-825lm-4000K-CRI 80	10 W	OXIDIZEDED
22014977-00	CLD S+L	0,35	LED-1856lm-4000K-CRI 80	23 W	OXIDIZEDED

Accessori



- Bracket - Microliset



- IP20 Microliset box



- Dimmable power supply



- Dimmable Interface - Microliset



- Adjustable Bracket - Microliset



- Screen for Microliset's profile



- Profile for Microliset

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated