



Download

DXF 2D
- 15572.dxf




Ominitrack with Cover

Three-phase track for 3 separate electrical circuits.

Rectangular-sectioned in extruded aluminium, it has an insulating PVC profile with 4 copper conductors, while the profile itself grounds the system. Maximum load: 16A for each conductor. Manufactured according to CEI34-17/EN60570/IEC570 standards, it has obtained ENEC European Certificate of Conformity.

Available in 3 sizes and 3 colours: white, black and natural oxidized aluminium. On request, Omnitrack can be easily cut to the desired lengths. Includes one end cap. Along the top of the track are slots to be used for fastening or cavities for insertion of accessories.

Apply to our offices for the IP certificate. Complete with one end cap.

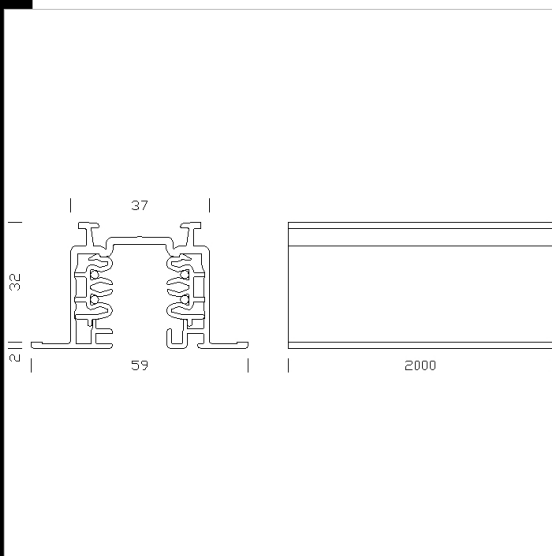

Code	Gear	Kg	WTot	Colour
22015274-00	S	3,60	0 W	OXIDIZED
22015073-00		0,00	0 W	NAT. OXIDIZED
22015375-00	S	4,80	0 W	OXIDIZED
22015072-00	S	1,60	0 W	OXIDIZED

Accessori



- Linear joint



- Power supply



- Linear joint



- External L-joint



- Circular joint 2 vie



- Left-hand T-joint



- Right-hand T-joint



- Internal L-joint



- Cross joint

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated