


## Liset MidPower - suspension

Housing: made of extruded and oxidized aluminum.  
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.  
 Power factor: >0,95 Luminous flux maintenance 80%: 50.000h (L80B20).  
 Photobiological safety class: exempt group EN62471.

### Download

- DXF 2D  
- midpowersosp1.dxf
- Montaggi  
- LISET\_MIDPOWER Rev3.pdf

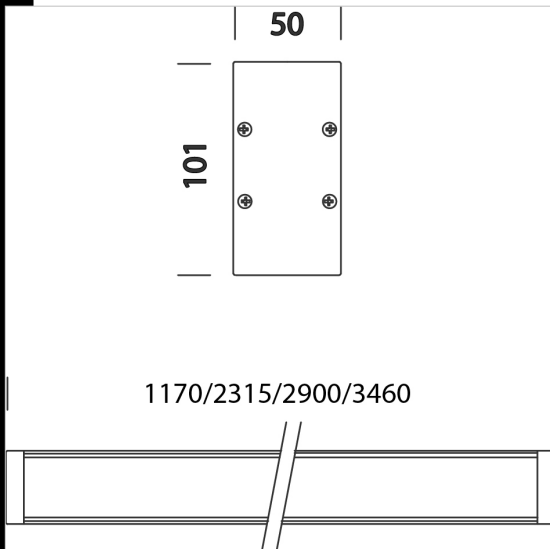

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22015714-00	CLD CELL	2.70	LED 4 modules-2865lm-4000K-CRI 80	27 W	WHITE
22015714-39	CLD CELL	2.88	LED 4 modules-2664lm-3000K-CRI 80	28 W	WHITE
22015714-94	CLD CELL-D-E	3.38	LED 4 Modules-2865lm-4000K-CRI 80	27 W	WHITE
22015714-9441	CLD CELL-D-D-E	0.00	LED 4 modules-2865lm-4000K-CRI 80	28 W	WHITE
22015718-00	CLD CELL	5.00	LED 8 modules-5732lm-4000K-CRI 80	55 W	WHITE
22015718-1241	CLD CELL-D-D	5.36	LED 8 Modules-5360lm-4000K-CRI 80	55 W	WHITE
22015718-09	CLD CELL-E	5.77	LED 8 modules-5732lm-4000K-CRI 80	55 W	WHITE
22015718-31	CLD CELL-E	0.00	LED 8 modules-5732lm-4000K-CRI 80	55 W	WHITE
22015718-94	CLD CELL-D-E	5.96	LED 8 Modules-5360lm-4000K-CRI 80	55 W	WHITE
22015718-39	CLD CELL	5.20	LED 8 modules-5331lm-3000K-CRI 80	55 W	WHITE
22015718-9441	CLD CELL-D-D-E	0.00	LED 8 modules-5732lm-4000K-CRI 80	55 W	WHITE
22015718-3941	CLD CELL-D-D	5.25	LED 8 modules-5331lm-3000K-CRI 80	55 W	WHITE
22015718-0928	CLD CELL-E	0.00	LED 8 modules-5331lm-3000K-CRI 80	55 W	WHITE
22015718-3957	CLD CELL-E	0.00	LED 8 modules-5331lm-3000K-CRI 80	55 W	WHITE
22015710-00	CLD CELL	6.40	LED 10 modules-7165lm-4000K-CRI 80	69 W	WHITE
22015710-1241	CLD CELL-D-D	6.47	LED 10 Modules-7165lm-4000K-CRI 80	68 W	WHITE
22015710-09	CLD CELL-E	6.94	LED 10 modules-7165lm-4000K-CRI 80	69 W	WHITE
22015710-31	CLD CELL-E	0.00	LED 10 modules-7165lm-4000K-CRI 80	69 W	WHITE
22015710-94	CLD CELL-D-E	6.25	LED 10 modules-7165lm-4000K-CRI 80	69 W	WHITE
22015710-9441	CLD CELL-D-D-E	0.00	LED 10 modules-7165lm-4000K-CRI 80	69 W	WHITE
22015710-39	CLD CELL	6.45	LED 10 modules-6663lm-3000K-CRI 80	69 W	WHITE
22015710-3941	CLD CELL-D-D	6.38	LED 10 modules-6663lm-3000K-CRI 80	69 W	WHITE
22015710-0928	CLD CELL-E	0.00	LED 10 modules-6663lm-3000K-CRI 80	69 W	WHITE
22015712-00	CLD CELL	10.00	LED 12 modules-8596lm-4000K-CRI 80	79 W	WHITE
22015710-3957	CLD CELL-E	0.00	LED 10 modules-6663lm-3000K-CRI 80	69 W	WHITE
22015712-1241	CLD CELL-D-D	7.83	LED 12 Modules-8035lm-4000K-CRI 80	79 W	WHITE
22015712-09	CLD CELL-E	0.00	LED 12 modules-8596lm-4000K-CRI 80	82 W	WHITE
22015712-94	CLD CELL-D-E	8.30	LED 12 Modules-8035lm-4000K-CRI 80	79 W	WHITE
22015712-9441	CLD CELL-D-D-E	0.00	LED 12 modules-8596lm-4000K-CRI 80	79 W	WHITE
22015712-31	CLD CELL-E	0.00	LED 12 modules-8596lm-4000K-CRI 80	82 W	WHITE
22015712-39	CLD CELL	0.00	LED 12 modules-7994lm-3000K-CRI 80	82 W	WHITE
22015712-3941	CLD CELL-D-D	7.58	LED 12 modules-7994lm-3000K-CRI 80	79 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

## Liset MidPower - suspension

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22015712-0928	CLD CELL-E	0.00	LED 12 modules-7994lm-3000K-CRI 80	82 W	WHITE
22015712-3957	CLD CELL-E	0.00	LED 12 modules-7994lm-3000K-CRI 80	82 W	WHITE

### Accessories



- Ceiling suspension



- Suspension wire



- Alignment brackets - Liset midpower



- Angle joint - Liset midpower

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated