




Liset MidPower - suspension

Housing: made of extruded and oxidized aluminum.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.
 LED: high-efficiency light sources 3880/7760/9720/11660lm -26/53/67/79W - 3000K - CRI80
 Power factor: >0,95
 Luminous flux maintenance 70% 50000h (L70B50)
 Photobiological safety class: exempt group EN62471.

Download

DXF 2D
 - midpowersosp1.dxf

Montaggi
 - midpoweracc.pdf

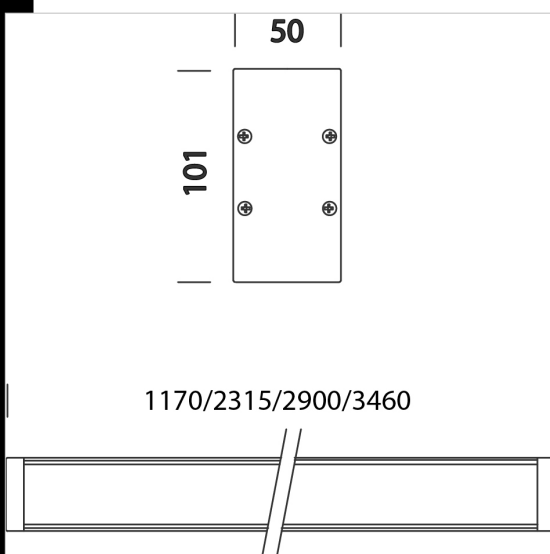

| Code | Gear | Kg | Watt | Base | Lamps | Colour |
|---------------|--------------|------|----------------|------|----------------------|--------|
| 22015714-12 | CLD CELL-D | 2,85 | LED 4 Modules | - | 3880lm-3000K-CRI 80 | WHITE |
| 22015718-12 | CLD CELL-D | 5,00 | LED 8 Modules | - | 7760lm-3000K-CRI 80 | WHITE |
| 22015712-12 | CLD CELL-D | 7,50 | LED 12 Modules | - | 11660lm-3000K-CRI 80 | WHITE |
| 22015710-12 | CLD CELL-D | 6,25 | LED 10 Modules | - | 9720lm-3000K-CRI 80 | WHITE |
| 22015718-94 | CLD CELL-D-E | 5,69 | LED 8 Modules | - | 7760lm-3000K-CRI 80 | WHITE |
| 22015718-1241 | CLD CELL-D-D | 5,36 | LED 8 Modules | - | 7760lm-3000K-CRI 80 | WHITE |
| 22015710-1241 | CLD CELL-D-D | 6,47 | LED 10 Modules | - | 9720lm-3000K-CRI 80 | WHITE |
| 22015710-94 | CLD CELL-D-E | 6,25 | LED 10 Modules | - | 9720lm-3000K-CRI 80 | WHITE |
| 22015712-1241 | CLD CELL-D-D | 7,83 | LED 12 Modules | - | 11660lm-3000K-CRI 80 | WHITE |
| 22015712-94 | CLD CELL-D-E | 7,50 | LED 12 Modules | - | 11660lm-3000K-CRI 80 | WHITE |
| 22015714-1241 | CLD CELL-D-D | 2,92 | LED 4 Modules | - | 3880lm-3000K-CRI 80 | WHITE |
| 22015714-94 | CLD CELL-D-E | 3,38 | LED 4 Modules | - | 3880lm-3000K-CRI 80 | WHITE |

Accessories



- Ceiling suspension



- Suspension wire