


Download

DXF 2D
- midpowersosp1.dxf
Montaggi
- LISET_MIDPOWER Rev3.pdf



Liset MidPower - suspension

Housing: made of extruded and oxidized aluminum.
Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.
Power factor: >0,95 Luminous flux maintenance 80%: 50.000h (L80B20).
Photobiological safety class: exempt group EN62471.

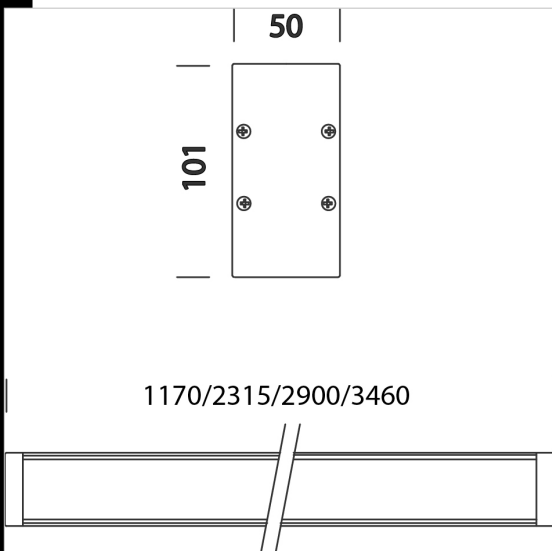

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22015714-1241	CLD CELL-D-D	2.92	LED 4 Modules-2865lm-4000K-CRI 80	27 W	WHITE
22015718-09	CLD CELL-E	5.77	LED 8 modules-5732lm-4000K-CRI 80	55 W	WHITE
22015718-31	CLD CELL-E	0.00	LED 8 modules-5732lm-4000K-CRI 80	55 W	WHITE
22015718-3941	CLD CELL-D-D	5.25	LED 8 modules-5331lm-3000K-CRI 80	55 W	WHITE
22015718-0928	CLD CELL-E	0.00	LED 8 modules-5331lm-3000K-CRI 80	55 W	WHITE
22015718-3957	CLD CELL-E	0.00	LED 8 modules-5331lm-3000K-CRI 80	55 W	WHITE
22015710-31	CLD CELL-E	0.00	LED 10 modules-7165lm-4000K-CRI 80	69 W	WHITE
22015710-0928	CLD CELL-E	0.00	LED 10 modules-6663lm-3000K-CRI 80	69 W	WHITE
22015710-3957	CLD CELL-E	0.00	LED 10 modules-6663lm-3000K-CRI 80	69 W	WHITE
22015712-09	CLD CELL-E	0.00	LED 12 modules-8596lm-4000K-CRI 80	82 W	WHITE
22015712-31	CLD CELL-E	0.00	LED 12 modules-8596lm-4000K-CRI 80	82 W	WHITE
22015712-39	CLD CELL	0.00	LED 12 modules-7994lm-3000K-CRI 80	82 W	WHITE
22015712-0928	CLD CELL-E	0.00	LED 12 modules-7994lm-3000K-CRI 80	82 W	WHITE
22015712-3957	CLD CELL-E	0.00	LED 12 modules-7994lm-3000K-CRI 80	82 W	WHITE

Accessories



- Ceiling suspension



- Suspension wire



- Alignment brackets - Liset midpower



- Angle joint - Liset midpower

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated