


Liset MidPower - Ceiling

Housing: made of extruded and oxidized aluminum.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.
 Power factor: >0,95 Luminous flux maintenance 80%: 50.000h (L80B20).
 Photobiological safety class: exempt group EN62471.



Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22015813-12	CLD CELL-D	5.19	LED 8 Modules-5423lm-3000K-CRI 80	55 W	WHITE
22015811-12	CLD CELL-D	3.03	LED 4 Modules-2711lm-3000K-CRI 80	27 W	WHITE

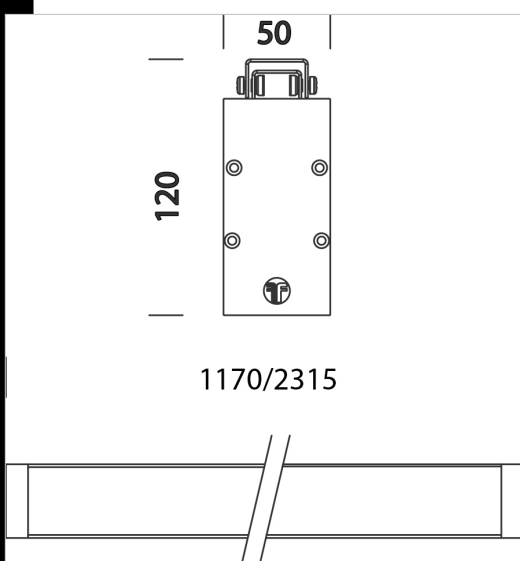

Download

DXF 2D
 - midpowerplaf1.dxf

Montaggi
 - LISET_MIDPOWER Rev3.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated