


## Liset MidPower - Ceiling

Housing: made of extruded and oxidized aluminum.  
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.  
 Power factor: >0,95 Luminous flux maintenance 80%: 50.000h (L80B20).  
 Photobiological safety class: exempt group EN62471.

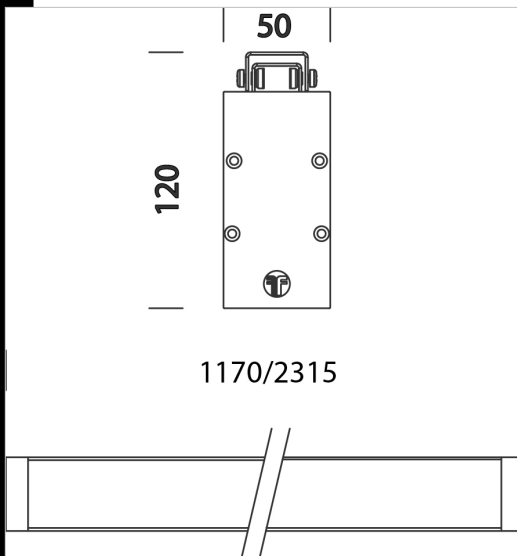

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22015811-00	CLD CELL	2.97	LED 4 Modules-2865lm-4000K-CRI 80	27 W	WHITE
22015811-1241	CLD CELL-D-D	3.03	LED 4 Modules-2865lm-4000K-CRI 80	27 W	WHITE
22015811-94	CLD CELL-D-E	3.45	LED 4 modules-2865lm-4000K-CRI 80	27 W	WHITE
22015811-9441	CLD CELL-D-D-E	0.00	LED 4 modules-2865lm-4000K-CRI 80	28 W	WHITE
22015811-39	CLD CELL	2.94	LED 4 modules-2664lm-3000K-CRI 80	28 W	WHITE
22015813-00	CLD CELL	5.35	LED 8 modules-5732lm-4000K-CRI 80	55 W	WHITE
22015811-3941	CLD CELL-D-D	0.00	LED 4 modules-2664lm-3000K-CRI 80	28 W	WHITE
22015813-1241	CLD CELL-D-D	5.26	LED 8 Modules-5360lm-4000K-CRI 80	55 W	WHITE
22015813-09	CLD CELL-E	0.00	LED 8 modules-5732lm-4000K-CRI 80	55 W	WHITE
22015813-94	CLD CELL-D-E	5.90	LED 8 Modules-5360lm-4000K-CRI 80	55 W	WHITE
22015813-31	CLD CELL-E	0.00	LED 8 modules-5732lm-4000K-CRI 80	55 W	WHITE
22015813-9441	CLD CELL-D-D-E	5.85	LED 8 modules-5732lm-4000K-CRI 80	55 W	WHITE
22015813-39	CLD CELL	5.33	LED 8 modules-5331lm-3000K-CRI 80	55 W	WHITE
22015813-3941	CLD CELL-D-D	0.00	LED 8 modules-5331lm-3000K-CRI 80	55 W	WHITE
22015813-0928	CLD CELL-E	0.00	LED 8 modules-5331lm-3000K-CRI 80	55 W	WHITE
22015813-3957	CLD CELL-E	0.00	LED 8 modules-5331lm-3000K-CRI 80	55 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated