


Liset MidPower - Wall

Housing: made of extruded and oxidized aluminum.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.
 Power factor: >0,95 Luminous flux maintenance 80%: 50.000h (L80B20).
 Photobiological safety class: exempt group EN62471.

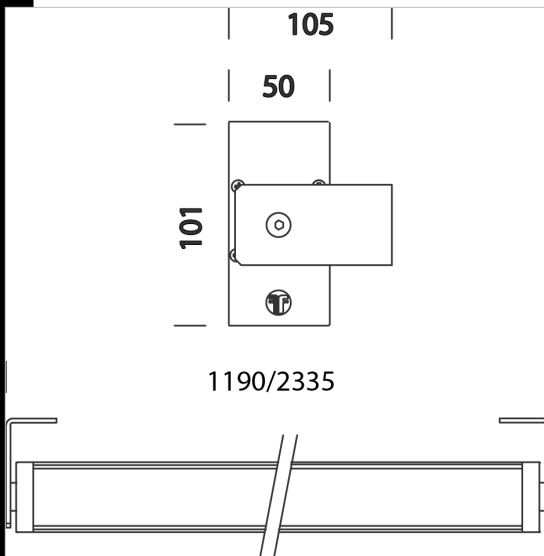

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22015814-00	CLD CELL	2.87	LED 4 Modules-2865lm-4000K-CRI 80	27 W	WHITE
22015818-00	CLD CELL	5.30	LED 8 Modules-5360lm-4000K-CRI 80	55 W	WHITE
22015814-94	CLD CELL-D-E	3.37	LED 4 Modules-2865lm-4000K-CRI 80	27 W	WHITE
22015818-94	CLD CELL-D-E	5.97	LED 8 Modules-5360lm-4000K-CRI 80	55 W	WHITE
22015814-1241	CLD CELL-D-D	2.89	LED 4 Modules-2535lm-4000K-CRI 80	27 W	WHITE
22015818-1241	CLD CELL-D-D	5.21	LED 8 Modules-5360lm-4000K-CRI 80	55 W	WHITE

Download

DXF 2D
 - midpowerpar1.dxf

Montaggi
 - LISET_MIDPOWER Rev3.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated