


Liset MidPower - Wall

Housing: made of extruded and oxidized aluminum.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.
 LED 4 modules 24W - 4000K - 2680lm - CRI 80 LED 8 modules 48W - 4000K - 5360lm - CRI 80 Power factor: >0,95
 Luminous flux maintenance 70% 50000h (L70B50)
 Photobiological safety class: exempt group EN62471.



Code	Gear	Kg	Watt	Base	Lamps	Colour
22015814-00	CLD CELL	2,86	LED 4 modules 24W		2680lm-4000K-CRI 80	WHITE
22015818-00	CLD CELL	5,30	LED 8 modules 48W		5360lm-4000K-CRI 80	WHITE
22015814-94	CLD CELL-D-E	3,37	LED 4 modules 24W		2680lm-4000K-CRI 80	WHITE
22015818-94	CLD CELL-D-E	5,00	LED 8 modules 48W		5360lm-4000K-CRI 80	WHITE
22015814-1241	CLD CELL-D-D	2,89	LED 4 modules 24W		2535lm-4000K-CRI 80	WHITE
22015818-1241	CLD CELL-D-D	5,00	LED 8 modules 48W		5360lm-4000K-CRI 80	WHITE
22015814-12	CLD CELL-D	2,86	LED 4 Modules	-	3880lm-3000K-CRI 80	WHITE
22015818-12	CLD CELL-D	5,32	LED 8 Modules	-	7760lm-3000K-CRI 80	WHITE

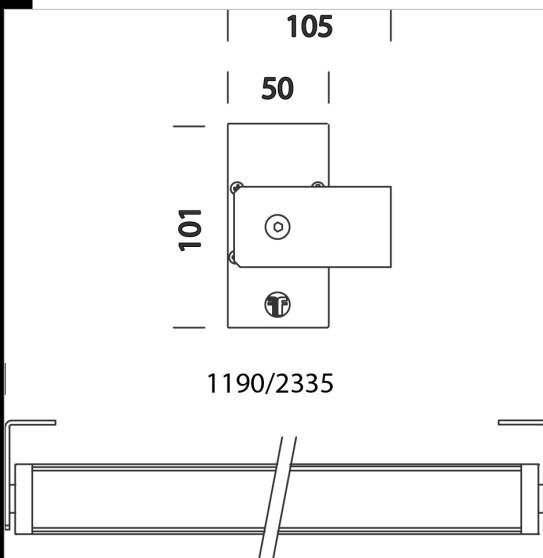

Download
 DXF 2D
 - midpowerpar1.dxf
 Montaggi
 - midpoweracc.pdf