



Download

DXF 2D
- 16075.dxf
Montaggi
- liset rgb.pdf



Liset with suspension LED Fullcolor

With its small dimensions, an essential and yet distinctive style, available in the cable-suspended and wall-mounted versions, Liset is an absolutely revolutionary fixture, designed to take the potential of LEDs to the maximum levels. Its minimalist lines combined with high performance emit extraordinary light effects, while ensuring very high energy savings.

Housing: in oxidized extruded aluminium.

Diffuser: transparent or matt polycarbonate material with a thickness of 0.75mm available upon request.

Standards: manufactured pursuant to EN 60598-CEI 34.21 and with a degree of protection pursuant to EN 60529.


70% maintenance of luminous flux at 50,000 hrs (L70B50).

Power factor: >0.95.

Photobiological risk: exempt group.

The luminous flux refers to each individual LED. Supplied with 9 RGB LEDs, 3.2 W each. Also includes Master and IRE Receiver power supply. The remote control should be purchased separately with code 22099020-00.

For multiple installations, please purchase Slave with code 22090871-00 (99 Liset max).

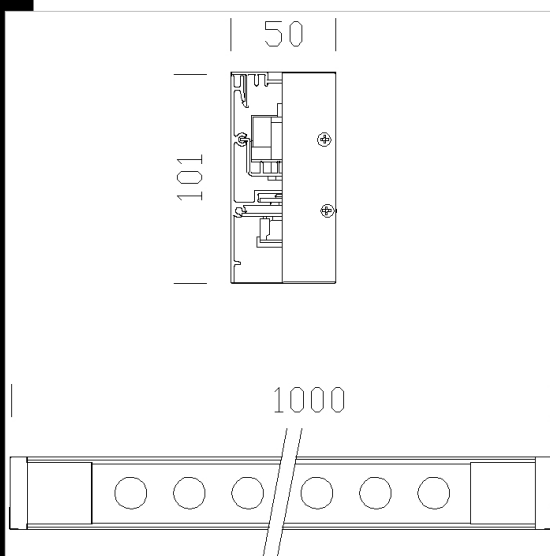

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22016074-00	CLD CELL	2.95	LED 9x3.2W RGB---	35 W	OXIDIZED

Accessories



- Ceiling suspension



- Ceiling suspension



- Powered suspension 3-5 p



- LED Master+ IRE



- Kit 1



- LED slave

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated