

Download

DXF 2D

- ipsessantacinqueled.dxf
- ipsessantacinqueled.dxf

Montaggi

- ip65_2.dxf
- LISET_IP65.pdf



Liset IP sessantacinque LED

A basic design, small dimensions. Liset is a ground breaking fixture studied to make the best use of the LED technology. Its sleek lines and liminous efficiency ensure extraordinary light and colour effect.

Housing: made of oxidized extruded aluminium.

Diffuser: made of clear polycarbonate, 3 mm thick.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

LED: Supplied with Q4 LED lights, "neutral white", 10°.


Power factor: >0,95

Luminous flux maintenance 70% 50000h (L70B50)

Photobiological safety class: exempt group EN62471.

Power supply to be purchased separately, code 92036 / 92038.

Standard connection, max 3.6 m of Liset IP sessantacinque

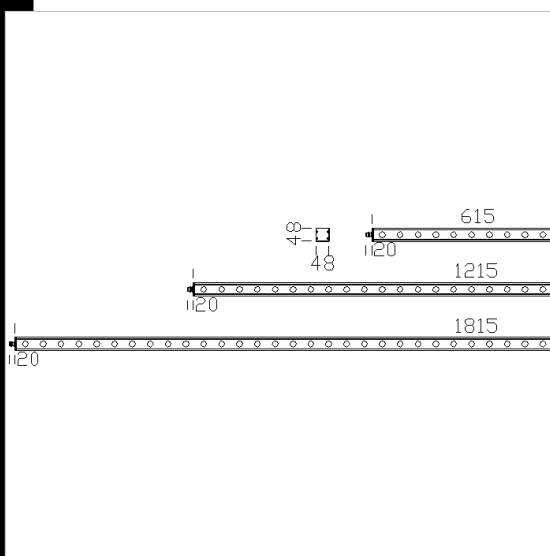

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22017079-00	CLD S+L	3,70	LED-105lm-4100K-	12 W	OXIDIZEDED
22017078-00	CLD S+L	1,50	LED-105lm-4100k-	9 W	OXIDIZEDED
22017071-00	CLD S+L	1,10	LED-105lm-4100k-	11 W	OXIDIZEDED
22017073-00	CLD S+L	3,00	LED 30x1.1W white-105lm-4100K-	33 W	OXIDIZEDED
22017076-00	CLD S+L	2,95	LED-105lm-4100K-	19 W	OXIDIZEDED
22017075-00	CLD S+L	1,50	LED-105lm-4100K-	13 W	OXIDIZEDED
22017072-00	CLD S+L	2,55	LED 20x1.1W white-105lm-4100k-	22 W	OXIDIZEDED
22017077-00	CLD S+L	1,50	LED-105lm-4100K-	4 W	OXIDIZEDED
22017074-00	CLD S+L	1,50	LED-105lm--	7 W	OXIDIZEDED

Accessori



- Ceiling suspension



- Driver IP20-IP65-IP67 LED - 24V



- Bracket - Liset IP65



- Suspension mount - Liset IP65



- Ceiling connection - Liset IP65



- Adjustable Bracket - Liset IP65

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated