

Micro Liset - Fullcolor


Led's open up amazing and unexpected lighting possibilities, The Microliset series ensure excellent light flux with a very high colour performance. A ground-breaking system that can electronically mix colours. Long-lasting, reliable fixtures need little maintenance. Excellent versatility, elegant and non-invasive, these luminaires provide perfect lighting without being seen.

Housing: made of oxidized extruded aluminium.

Diffuser: made of clear polycarbonate,

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Photobiological safety class: exempt group EN62471.

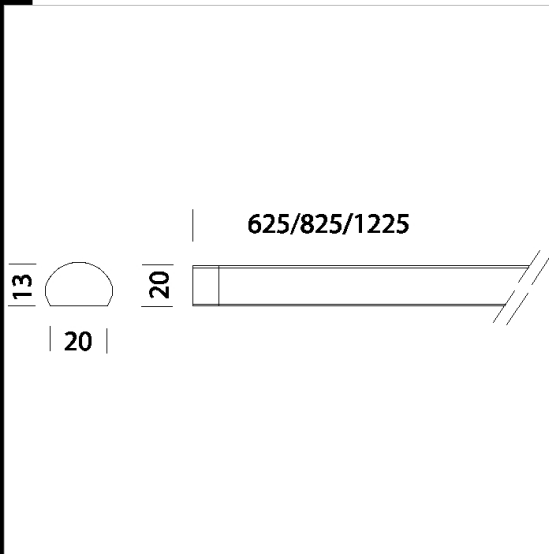

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22017680-00	CLD S+L	1,50	LED-Fullcolor--	4 W	OXIDIZED
22017681-00	CLD S+L	1,50	LED-Fullcolor--	6 W	OXIDIZED
22017682-00	CLD S+L	1,50	LED-Fullcolor--	9 W	OXIDIZED
22017280-00	CLD S+L	0,25	LED-Fullcolor--	9 W	OXIDIZED
22017281-00	CLD S+L	0,35	LED-Fullcolor--	13 W	OXIDIZED
22017282-00	CLD S+L	0,45	LED-Fullcolor--	18 W	OXIDIZED

Accessori



- Remote for IRE receiver



- RGB DMX Control



- Power supply + Connector - RGB



- IRE Receiver

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated