




**Download**

DXF 2D  
- minilinea a.dxf

## Minilinea A

Lamp available in the recessed or linear suspended version for direct lighting. Its design is at once neutral and sophisticated, reproducing elegant effects in space. Applications include offices, individual worktops and home interiors. Housing: in extruded aluminium. Diffuser: made of polycarbonate with a prismatic structure. Equipment: supplied with accessories

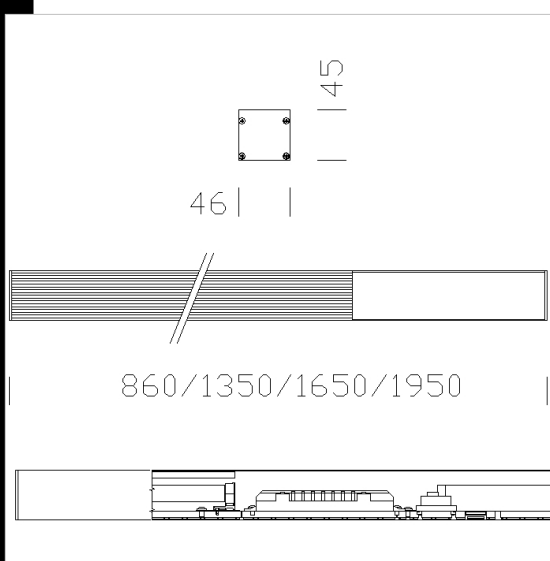

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22017471-00	CELL	1.20	FL 1x14-1250lm-4000K-Ra 1b	16 W	G5	OSSIDATO
22017473-00	CELL	1.70	FL 1x24-1750lm-4000K-Ra 1b	24 W	G5	OSSIDATO
22017475-00	CELL	1.50	FL 1x28-2650lm-4000K-Ra 1b	32 W	G5	OSSIDATO
22017479-00	CELL	2.30	FL 1x35-3350lm-4000K-Ra 1b	38 W	G5	OSSIDATO

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated