


## Minilinea B

Lamp available in the recessed or linear suspended version for direct lighting. Its design is at once neutral and sophisticated, reproducing elegant effects in space. Applications include offices, individual worktops and home interiors.  
 Housing: in extruded aluminium.  
 Diffuser: made of polycarbonate with a prismatic structure.  
 Equipment: supplied with suspension accessories (steel wires and ceiling roses).



### Download

DXF 2D  
 - minilinea b.dxf

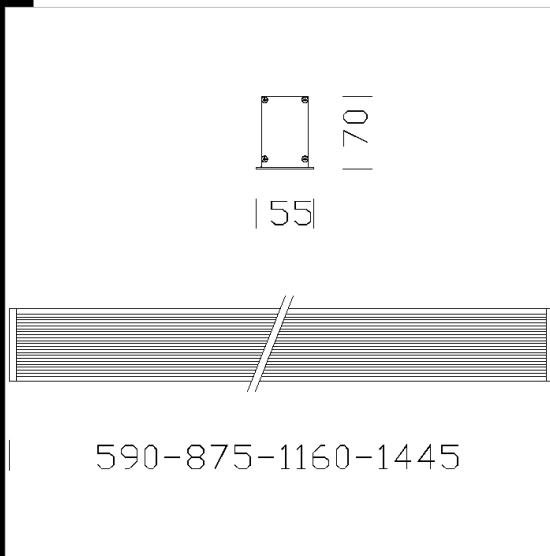

| Code        | Gear | Kg   | Lumen-K-CRI                | WTot | Base | Colour   |
|-------------|------|------|----------------------------|------|------|----------|
| 22017574-00 | CELL | 1.60 | FL 1x24-1750lm-4000K-Ra 1b | 24 W | G5   | OXIDIZED |
| 22017578-00 | CELL | 2.30 | FL 1x35-3350lm-4000K-Ra 1b | 38 W | G5   | OXIDIZED |
| 22017576-00 | CELL | 2.21 | FL 1x28-2650lm-4000K-Ra 1b | 32 W | G5   | OXIDIZED |
| 22017572-00 | CELL | 0.95 | FL 1x14-1250lm-4000K-Ra 1b | 16 W | G5   | OXIDIZED |

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated