



## Micro Liset

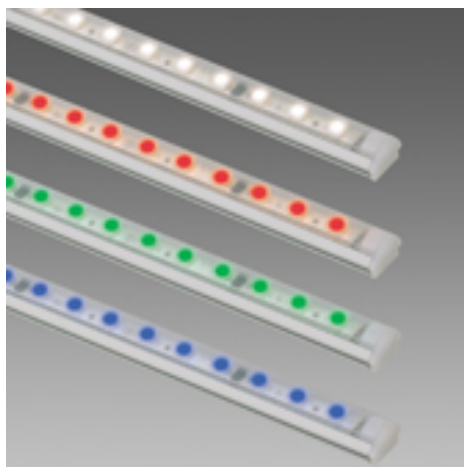

Code	Gear	Colour	Dimensions	W Tot	lamp
22017270-00	CLD S+L	nat. oxid.	625x20x20	7,2	LED 36x0.2W white-16lm cad.-3200K-CRI 96
22017271-00	CLD S+L	nat. oxid.	925x20x20	10,8	LED 54x0.2W white-16lm cad.-3200K-CRI 96
22017272-00	CLD S+L	nat. oxid.	1225x20x0	14,4	LED 72x0.2W white-16lm cad.-3200K-CRI 96
22017273-00	CLD S+L	nat. oxid.	625x20x20	10,8	LED 36x0.3W white-17lm cad.-4100K-CRI 75
22017274-00	CLD S+L	nat. oxid.	925x20x20	16,2	LED 54x0.3W white-17lm cad.-4100K-CRI 75
22017278-00	CLD S+L	nat. oxid.	1225x20x20	21,6	LED 72x0.3W white-17lm cad.-4100K-CRI 75
22017280-00	CLD S+L	nat. oxid.	625x20x20		LED 36x0.25W RGB-RGB
22017281-00	CLD S+L	nat. oxid.	925x20x20		LED 54x0.25W RGB-RGB
22017282-00	CLD S+L	nat. oxid.	1225x20x20		LED 72x0.25W RGB-RGB
22017670-00	CLD S+L	nat. oxid.	625x20x20	3,6	LED 18x0.2W white-16lm cad.-3200K-CRI 96
22017671-00	CLD S+L	nat. oxid.	925x20x20	5,4	LED 27x0.2W white-16lm cad.-3200K-CRI 96
22017672-00	CLD S+L	nat. oxid.	1225x20x20	7,2	LED 36x0.2W white-16lm cad.-3200K-CRI 96
22017673-00	CLD S+L	nat. oxid.	625x20x20	5,4	LED 18x0.3W white-17lm cad.-4100K-CRI 75
22017674-00	CLD S+L	nat. oxid.	925x20x20	8,1	LED 27x0.3W white-17lm cad.-4100K-CRI 75
22017678-00	CLD S+L	nat. oxid.	1225x20x20	10,8	LED 36x0.3W white-17lm cad.-4100K-CRI 75
22017680-00	CLD S+L	nat. oxid.	625x20x20		LED 18x0.25W RGB-RGB
22017681-00	CLD S+L	nat. oxid.	855x20x20		LED 24x0.25W RGB-RGB
22017682-00	CLD S+L	nat. oxid.	1225x20x20		LED 36x0.25W RGB-RGB
22017870-00	CLD S+L	nat. oxid.	625x20x20	2,4	LED 12x0.2W-16lm cad.-3200K-CRI 96
22017871-00	CLD S+L	nat. oxid.	925x20x20	3,6	LED 18x0.2W white-16lm cad.-3200K-CRI 96
22017872-00	CLD S+L	nat. oxid.	1225x20x20	4,8	LED 24x0.2W white-16lm cad.-3200K-CRI 96

Code	Gear	Colour	Dimensions	W Tot	lamp
22017873-00	CLD S+L	nat. oxid.	625x20x20	3,6	LED 12x0.3W-17lm cad.-4100K-CRI 75
22017874-00	CLD S+L	nat. oxid.	925x20x20	5,4	LED 18x0.3W white-17lm cad.-4100K-CRI 75
22017878-00	CLD S+L	nat. oxid.	1225x20x20	7,2	LED 24x0.3W white-17lm cad.-4100K-CRI 75

Range of linear, using high efficiency and high luminosity LED. Elegant and non-invasive, these luminaires provide perfect lighting without being seen.

•Micro Liset

Available color temperature:

3200k Ra96 16lm each.- 4100k Ra75 17lm each. Use transformer acc. 22092022-00 (MAX 70W) or 22090839-00 (MAX 20W). DIM 22090840-00

RBG

22090860-00 power supply

22090861-00 DMX

22099050-00 Receiver