


## Liset IP sessantacinque LED - Wallwasher

A basic design, small dimensions. Liset is a ground breaking fixture studied to make the best use of the LED technology. Its clean lines and liminous efficiency ensure extraordinary light and colour effect.

Housing: made of oxidized extruded aluminium.  
 End cap: made of die-cast aluminium with polyester coating for exteriors.  
 Diffuser: glass prismatic

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.  
 Supplied with Q4 LED lights, "neutral white",  
 Power factor: >0,95  
 Luminous flux maintenance: 70% 50000h (L70B50)  
 Photobiological safety class: exempt group EN62471.  
 Power supply to be purchased separately, code 92036 / 92038.  
 Standard connection, max 3.6 m of Liset IP sessantacinque

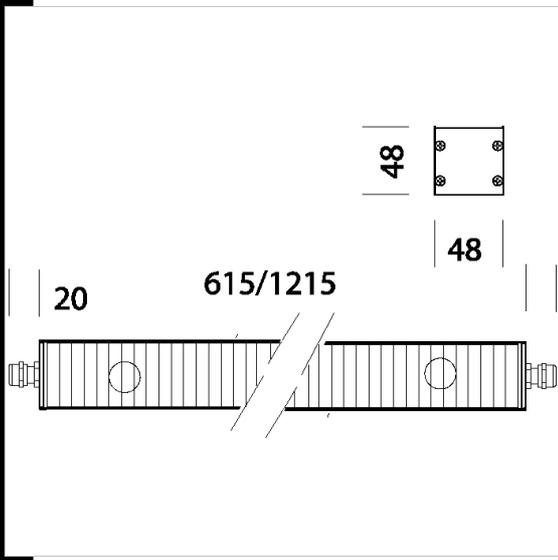

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22018060-00	CLD S+L	1.36	LED-1301lm-4000K-CRI 80	16 W	OXIDIZED
22018061-00	CLD S+L	2.57	LED 20x1.6W white-2602lm-4100K-CRI 80	32 W	OXIDIZED
22018062-00	CLD S+L	3.25	LED-3903lm-4100K-CRI 80	48 W	OXIDIZED

**Download**

DXF 2D  
 - 18075.dxf

Montaggi  
 - LISET\_IP65.pdf

BIM  
 - Liset IP sessantacinque LED - Wallwasher - 20200915.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated