


Micro Liset IP65

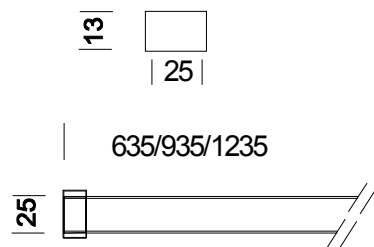

Code	Gear	Colour	Dimensions	lamp
22018270-00	CLD S+L	nat. oxid.	635x25x13	LED 12x0.2W-16lm cad.-3200K-CRI 96
22018271-00	CLD S+L	nat. oxid.	935x25x13	LED 18x0.2W white-16lm cad.-3200K-CRI 96
22018272-00	CLD S+L	nat. oxid.	1235x25x13	LED 24x0.2W white-16lm cad.-3200K-CRI 96
22018176-00	CLD S+L	nat. oxid.	635x25x13	LED 36x0.3W white-17lm cad.-4100K-CRI 75
22018177-00	CLD S+L	nat. oxid.	935x25x13	LED 54x0.3W white-17lm cad.-4100K-CRI 75
22018178-00	CLD S+L	nat. oxid.	1235x25x13	LED 72x0.3W white-17lm cad.-4100K-CRI 75
22018370-00	CLD S+L	nat. oxid.	635x25x13	LED 18x0.2W white-16lm cad.-3200K-CRI 96
22018371-00	CLD S+L	nat. oxid.	935x25x13	LED 27x0.2W white-16lm cad.-3200K-CRI 96
22018372-00	CLD S+L	nat. oxid.	1235x25x13	LED 36x0.2W white-16lm cad.-3200K-CRI 96
22018170-00	CLD S+L	nat. oxid.	635x25x13	LED 36x0.2W white-16lm cad.-3200K-CRI 96
22018171-00	CLD S+L	nat. oxid.	935x25x13	LED 54x0.2W white-16lm cad.-3200K-CRI 96
22018172-00	CLD S+L	nat. oxid.	1235x25x13	LED 72x0.2W white-16lm cad.-3200K-CRI 96
22018276-00	CLD S+L	nat. oxid.	635x25x13	LED 12x0.3W-17lm cad.-4100K-CRI 75
22018277-00	CLD S+L	nat. oxid.	938x25x13	LED 18x0.3W white-17lm cad.-4100K-CRI 75
22018278-00	CLD S+L	nat. oxid.	1235x25x13	LED 24x0.3W white-17lm cad.-4100K-CRI 75
22018376-00	CLD S+L	nat. oxid.	635x25x13	LED 18x0.3W white-17lm cad.-4100K-CRI 75
22018377-00	CLD S+L	nat. oxid.	935x25x13	LED 27x0.3W white-17lm cad.-4100K-CRI 75
22018378-00	CLD S+L	nat. oxid.	1235x25x13	LED 36x0.3W white-17lm cad.-4100K-CRI 75

Range of linear, using high efficiency and high luminosity LED. Elegant and non-invasive, these luminaires provide perfect lighting without being seen.

•Micro Liset fixed IP65

Available color temperature:

3200k - 4100k use transformer IP20 acc. 22092022-00 (MAX 70W) or 22090839-00 (MAX 20W) and use transformer IP67 acc. 22092036-00 (MAX70W) o 22092038-00 (MAX150W).

DIM 22090840-00