

## Micro Liset - IP65

Led's open up amazing and unexpected lighting possibilities, The Microliset series ensure excellent light flux with a very high colour performance. Long-lasting, reliable fixtures need little maintenance. Excellent versatility, elegant and non-invasive, these luminaires provide perfect lighting without being seen.

Housing: made of oxidized extruded aluminium.

Diffuser: made of clear polycarbonate,

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

use transformer IP20 acc. 22092022-00 (MAX 70W) or 22090839-00 (MAX 20W) and use transformer IP67 acc. 22092036-00 (MAX70W) o 22092038-00 (MAX150W), DIM 22090840-00

Microliset IP65 fittings have a level of water protection rated at IP65IK07 if installed in environments with temperatures that do not exceed 45°C. Direct exposure to sunlight causes the temperature to readily exceed 45°C, compromising the degree of protection IP65IK07. The lighting fittings must be used appropriately without changing the mechanical and protection features and must not be installed on surfaces subject to strong vibrations, outdoors on cables or poles.

Power factor: >0,95


Luminous flux maintenance 80%: 50.000h (L80B20)

Photobiological safety class: exempt group EN62471.

### Download

DXF 2D  
- 17270.dxf

Montaggi  
- MICROLISET WHITE IP65 rev5.pdf

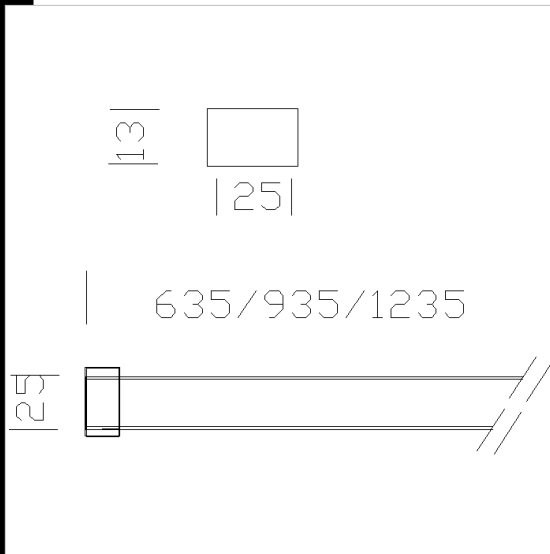

Code	Gear	Kg	Lumen-K-CRI	WTot	Colour
22018171-00	CLD S+L	0.40	LED-1620lm-3000K-CRI 92	11 W	OSSIDATO
22018178-00	CLD S+L	0.46	LED-2736lm-4000K-CRI 80	22 W	OSSIDATO
22018378-00	CLD S+L	0.45	LED-1368lm-4000K-CRI 80	9 W	OSSIDATO
22018170-00	CLD S+L	0.25	LED-1080lm-3000K-CRI 92	7 W	OSSIDATO
22018370-00	CLD S+L	0.30	LED-540lm-3000K-CRI 92	4 W	OSSIDATO
22018177-00	CLD S+L	0.35	LED-2052lm-4000K-CRI 80	16 W	OSSIDATO
22018176-00	CLD S+L	0.29	LED-1368lm-4000K-CRI 80	11 W	OSSIDATO
22018372-00	CLD S+L	0.45	LED-1080lm-3000K-CRI 92	9 W	OSSIDATO
22018376-00	CLD S+L	0.50	LED-684lm-4000K-CRI 80	5 W	OSSIDATO
22018172-00	CLD S+L	0.45	LED-2160lm-3000K-CRI 92	18 W	OSSIDATO

### Accessories



- Bracket - Microliset



- Driver IP20-IP65-IP67 LED - 24V



- IP20 Microliset box



- Dimmable power supply



- Dimmable Interface - Microliset



- Adjustable Bracket - Microliset

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated