

Micro Liset opal - 3000K - CRI 92

Led's open up amazing and unexpected lighting possibilities, The Microliset series ensure excellent light flux with a very high colour performance. A ground-breaking system that can electronically mix colours. Long-lasting, reliable fixtures need little maintenance. Excellent versatility, elegant and non-invasive, these luminaires provide perfect lighting without being seen.

Housing: made of oxidized extruded aluminium.

Diffuser: made of opal polycarbonate,


Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Use transformer IP20 acc. 22092022-00 (MAX 70W) or 22090839-00 (MAX 20W) and use transformer IP67 acc. 22092036-00 (MAX70W) o 22092038-00 (MAX150W). DIM 22090840-00

Power factor: >0,95

Luminous flux maintenance 70% 50000h (L70B50)

Photobiological safety class: exempt group EN62471.

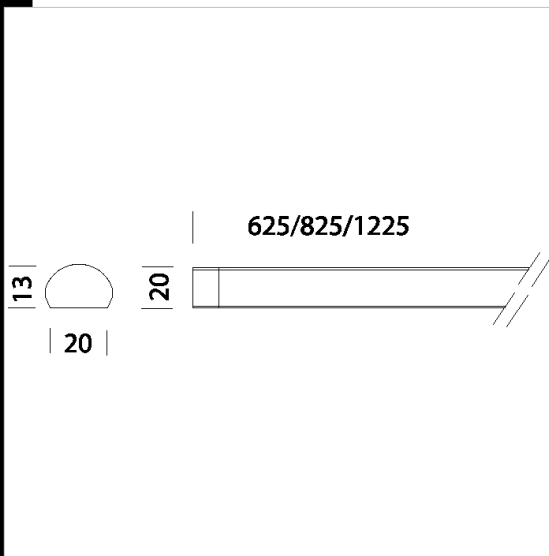

Code	Gear	Kg	Watt	Base	Lamps	Colour
22018471-00	CLD S+L	0,30	LED white 24x0.32W		720lm-3000K-CRI 92	OXIDIZEDD
22018472-00	CLD S+L	0,40	LED white 36x0.32W		1080lm-3000K-CRI 92	OXIDIZEDD
22018470-00	CLD S+L	0,25	LED white 18x0.32W		540lm-3000K-CRI 92	OXIDIZEDD

Accessories



- Profile for Microliset



- Dimmable power supply



- Screen for Microliset's profile



- Bracket - Microliset



- Dimmable Interface - Microliset



- IP20 Microliset box



- Adjustable Bracket - Microliset



- IP67 LED box - 24V

HOTEL
★★★★★

♻️

F

III

CE

IP40

UV

Colour quality

IK07

RG0

CLD S+L

Download
DXF 2D
- micropale.dxf
Montaggi
- microliset.pdf
- microliset incasso.dxf