

Micro Liset - for solid line - 4000K - CRI 80

Led's open up amazing and unexpected lighting possibilities, The Microliset series ensure excellent light flux with a very high colour performance. Long-lasting, reliable fixtures need little maintenance. Excellent versatility, elegant and non-invasive, these luminaires provide perfect lighting without being seen.

Housing: made of oxidized extruded aluminium.

Diffuser: made of clear polycarbonate,

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.


Available color temperature:

3200k - 4100k - CRI 96/75. use transformer IP20 acc. 22092022-00 (MAX 70W) or 22090839-00 (MAX 20W) and use transformer IP67 acc. 22092036-00 (MAX70W) o 22092038-00 (MAX150W). DIM 22090840-00

Power factor: >0,95

Luminous flux maintenance 70% 50000h (L70B50)

Photobiological safety class: exempt group EN62471.

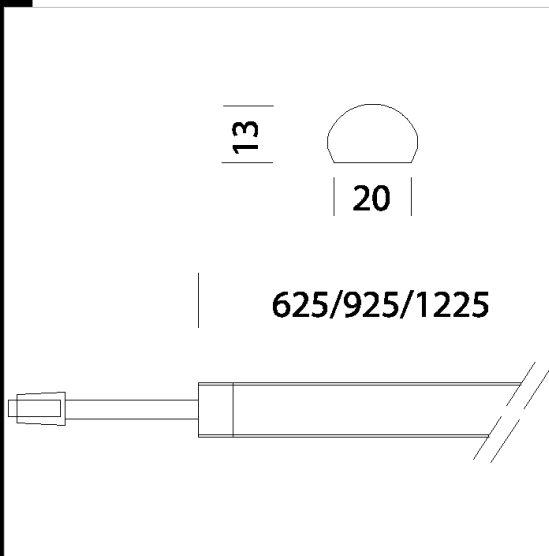

Code	Gear	Kg	Watt	Base	Lamps	Colour
22018973-00	CLD S+L	0,45	LED white 72x0.32W		2736lm-4000K-CRI 80	OXIDIZEDD
22018775-00	CLD S+L	0,25	LED white 36x0.32W		1368lm-4000K-CRI 80	OXIDIZEDD
22018772-00	CLD S+L	0,40	LED white 36x0.32W		1368lm-4000K-CRI 80	OXIDIZEDD
22018970-00	CLD S+L	0,35	LED white 54x0.32W		2052lm-4000K-CRI 80	OXIDIZEDD

Accessories



- Wall bracket for cylindrical



- Profile for Microliset



- Screen for Microliset's profile



- Dimmable Interface - Microliset



- IP20 Microliset box



- Adjustable Bracket - Microliset



- IP67 LED box - 24V

Download
DXF 2D
- microcont.dxf