



Micro Liset - for solid line - 3000K - CRI 92

Led's open up amazing and unexpected lighting possibilities, The Microliset series ensure excellent light flux with a very high colour performance. Long-lasting, reliable fixtures need little maintenance. Excellent versatility, elegant and non-invasive, these luminaires provide perfect lighting without being seen.

Housing: made of oxidized extruded aluminium.

Diffuser: made of clear polycarbonate,


Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Use transformer IP20 acc. 22092022-00 (MAX 70W) or 22090839-00 (MAX 20W) and use transformer IP67 acc. 22092036-00 (MAX70W) or 22092038-00 (MAX150W). DIM 22090840-00

Power factor: >0,95

Luminous flux maintenance 70% 50000h (L70B50)

Photobiological safety class: exempt group EN62471.

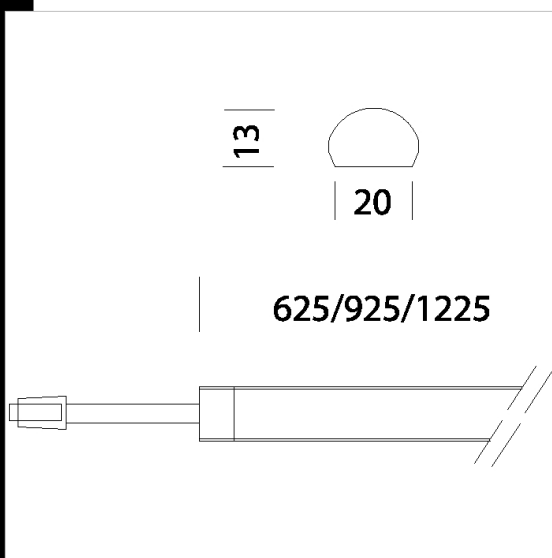

Code	Gear	Kg	Watt	Base	Lamps	Colour
22018770-00	CLD S+L	0,45	LED white 36x0.32W		1080lm-3000K-CRI 92	OXIDIZEDD
22018773-00	CLD S+L	0,25	LED white 36x0.32W		1080lm-3000K-CRI 92	OXIDIZEDD
22018972-00	CLD S+L	0,35	LED white 54x0.32W		1620lm-3000K-CRI 92	OXIDIZEDD
22018975-00	CLD S+L	0,40	LED white 72x0.32W		2160lm-3000K-CRI 92	OXIDIZEDD

Accessories



- Profile for Microliset



- Screen for Microliset's profile



- Bracket - Microliset



- Dimmable Interface - Microliset



- IP20 Microliset box



- Adjustable Bracket - Microliset



- IP67 LED box - 24V