




Maxi Liset IP54 LED

Housing: made of oxidized extruded aluminium.
 Heads: in die-cast aluminium with polyester coating for exteriors.
 Diffuser: made of glass
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.
 Power factor: >0,95
 Luminous flux maintenance 70% 50000h (L70B50)
 Photobiological safety class: exempt group EN62471.

Download

DXF 2D
 - maxilisetip54led.dxf
 Montaggi
 - maxilisetacc.pdf
 - maxilisetip54.pdf

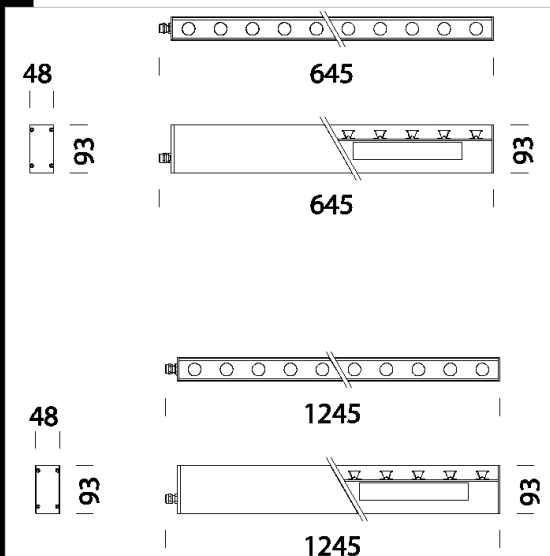

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22019373-00	CLD CELL	2,35	LED-121lm-4100K-CRI 80	19 W	OXIDIZED
22019374-00	CLD CELL	3,65	LED-121lm-4100K-CRI 80	37 W	OXIDIZED

Accessori



- Ceiling suspension



- Ceiling connection



- Ceiling suspension



- Powered suspension 3-5 p



- Bracket - Maxi Liset



- Alignment joint - Maxi Liset



- Bracket - Maxi Liset



- Adjustable Bracket - Maxi Liset



- Bracket for Omnitrack - Maxi Liset

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated