


Download
DXF 2D
- miniliset.dxf



Mini Liset with suspension

Housing:made of extruded and oxidized aluminum.
Diffuser: matt polycarbonate 0.75mm thick.

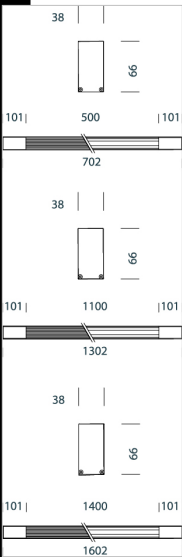

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22019872-00	CELL	2.65	FL 1x35-3350lm-4000K-Ra 1b	35 W	G5	OXIDIZED
22019870-00	CELL	1.35	FL 1x14-1250lm-4000K-Ra 1b	14 W	G5	OXIDIZED
22019871-00	CELL	1.85	FL 1x28-2650lm-4000K-Ra 1b	28 W	G5	OXIDIZED

Accessories



- Ceiling suspension



- Ceiling suspension



- Suspension wire



- Powered suspension 3-5 p

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated