


## Asso

Housing: Die-cast aluminium with cooling holes.  
 Reflector: in die-cast polished aluminium, high efficiency and anti-glare.  
 Coating: Power-coated with a UV-resistant polyester paint.  
 Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.  
 3000K - 1700lm - 18W - CRI 90 - 25°.  
 3000K - 2500lm - 24W - CRI 90 - 25°.  
 3000K - 3600lm - 29W - CRI 96 - 25°.  
 Luminous flux maintenance L70B50: 50.000h.  
 Power factor >0.9  
 Photobiological safety class: exempt group EN62471.

### Download

- DXF 2D  
- asso1.dxf
- 3DS  
- fosnova\_asso.3ds
- 3DM  
- fosnova\_asso.3dm
- Montaggi  
- istrifocus.pdf

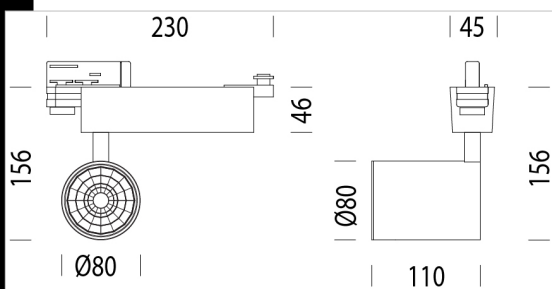

Code	Gear	Kg	Watt	Base	Lamps	Colour
22040410-00	CLD CELL	0,98	LED COB 18W		1700lm-3000K - 25°-CRI 90	WHITE
22040310-00	CLD CELL	1,03	LED COB 24W		2500lm-3000K - 25°-CRI 90	WHITE
22040311-00	CLD CELL	1,02	LED COB 29W		3600lm-3000K - 25°-CRI 96	WHITE