



Stilo - suspension - SP2

Housing : in aluminium.
Luminous flux maintenance 80%: 50000h (L80B20). Regulations: manufactured in compliance with EN 60598-1-CEI 34.21 standards, protection level according to EN 60529 standards.

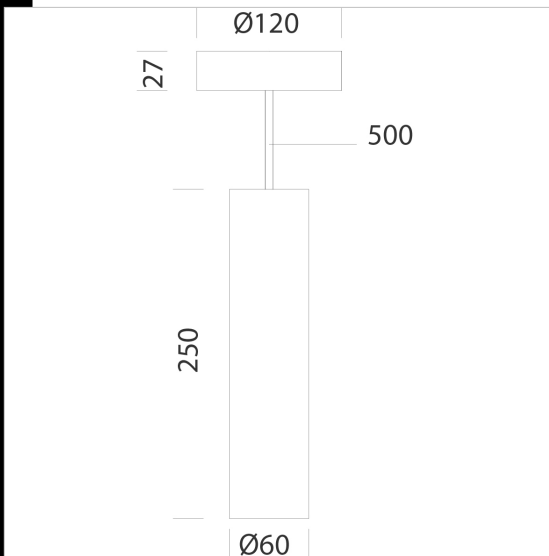

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Base	Colour
22041613-00	CLD CELL	0.40	LED COB-600lm-3000K-38°-CRI 80	7 W	GU10	BIANCO
22041663-00	CLD CELL	0.60	LED COB-600lm-3000K-38°-CRI 80	7 W	GU10	OSSIDATO
22041614-00	CLD CELL-D	0.65	LED-600lm-3000K-36°-CRI 80	9 W	GU10	BIANCO
22041664-00	CLD CELL-D	0.50	LED-600lm-3000K-36°-CRI 80	9 W	GU10	OSSIDATO
22041615-00	CLD CELL-D	0.50	LED COB-870lm-3000K-38°-CRI 92	9 W		BIANCO
22041665-00	CLD CELL-D	0.50	LED COB-870lm-3000K-38°-CRI 92	9 W		OSSIDATO
22041811-00	CLD CELL	0.60	LED-893lm-3000K-40°-CRI 90	10 W		BIANCO
22041831-00	CLD CELL	0.67	LED-893lm-3000K-40°-CRI 90	10 W		NERO
22041861-00	CLD CELL	0.73	LED-893lm-3000K-40°-CRI 90	10 W		CROMATO
22041810-00	CLD CELL-DI	0.72	LED-893lm-3000K-40°-CRI 90	10 W		BIANCO
22041830-00	CLD CELL-DI	0.64	LED-893lm-3000K-40°-CRI 90	10 W		NERO
22041860-00	CLD CELL-DI	0.74	LED-893lm-3000K-40°-CRI 90	10 W		CROMATO
22041811-1241	CLD CELL-D-D	0.70	LED-893lm-3000K-40°-CRI 90	10 W		BIANCO
22041831-1241	CLD CELL-D-D	0.70	LED-893lm-3000K-40°-CRI 90	10 W		NERO
22041861-1241	CLD CELL-D-D	0.70	LED-893lm-3000K-40°-CRI 90	10 W		CROMATO
22041810-1241	CLD CELL-D-D	0.70	LED-893lm-3000K-40°-CRI 90	10 W		BIANCO
22041830-1241	CLD CELL-D-D	0.70	LED-893lm-3000K-40°-CRI 90	10 W		NERO
22041860-1241	CLD CELL-D-D	0.70	LED-893lm-3000K-40°-CRI 90	10 W		CROMATO
22041811-68	CLD CELL	0.60	LED-956lm-4000K-40°-CRI 90	10 W		BIANCO
22041831-68	CLD CELL	0.70	LED-956lm-4000K-40°-CRI 90	10 W		NERO
22041861-68	CLD CELL	0.70	LED-956lm-4000K-40°-CRI 90	10 W		CROMATO
22041810-1213	CLD CELL-DI	0.70	LED-956lm-4000K-40°-CRI 90	10 W		BIANCO
22041830-1213	CLD CELL-DI	0.70	LED-956lm-4000K-40°-CRI 90	10 W		NERO
22041860-1213	CLD CELL-DI	0.70	LED-956lm-4000K-40°-CRI 90	10 W		CROMATO
22041811-6841	CLD CELL-D-D	0.70	LED-956lm-4000K-40°-CRI 90	10 W		BIANCO
22041831-6841	CLD CELL-D-D	0.70	LED-956lm-4000K-40°-CRI 90	10 W		NERO
22041861-6841	CLD CELL-D-D	0.70	LED-956lm-4000K-40°-CRI 90	10 W		CROMATO
22041830-6841	CLD CELL-D-D	0.70	LED-956lm-4000K-40°-CRI 90	10 W		NERO
22041810-6841	CLD CELL-D-D	0.70	LED-956lm-4000K-40°-CRI 90	10 W		BIANCO
22041860-6841	CLD CELL-D-D	0.70	LED-956lm-4000K-40°-CRI 90	10 W		CROMATO

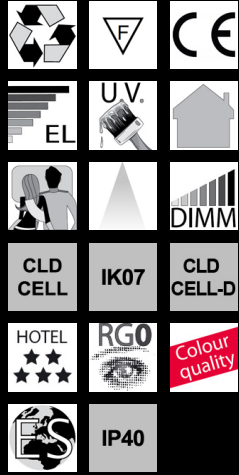

Download

DXF 2D
- st1.dxf
Montaggi
- STILO_LED rev4.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated