




Download

- DXF 2D - st2.dxf
- Montaggi - STILO_LED rev4.pdf



Stilo - base - PA2

Housing : in aluminium.
Luminous flux maintenance 80%: 50000h (L80B20). Regulations: manufactured in compliance with EN 60598-1-CEI 34.21 standards, protection level according to EN 60529 standards.

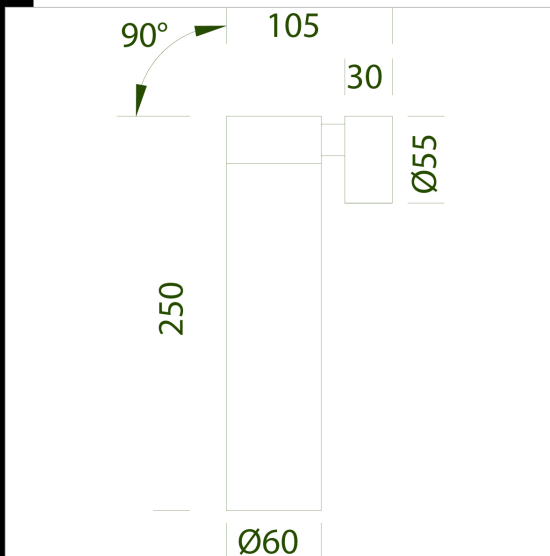

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22041911-00	CLD	0.96	LED-893lm-3000K-40°-CRI 90	10 W	WHITE
22041931-00	CLD	1.02	LED-893lm-3000K-40°-CRI 90	10 W	BLACK
22041961-00	CLD	0.77	LED-893lm-3000K-40°-CRI 90	10 W	CHROME
22041910-00	CLD-DI	0.83	LED-893lm-3000K-40°-CRI 90	10 W	WHITE
22041930-00	CLD-DI	0.60	LED-893lm-3000K-40°-CRI 90	10 W	BLACK
22041960-00	CLD-DI	0.75	LED-893lm-3000K-40°-CRI 90	10 W	CHROME
22041911-1241	CLD CELL-D-D	0.80	LED-893lm-3000K-40°-CRI 90	10 W	WHITE
22041931-1241	CLD CELL-D-D	0.80	LED-893lm-3000K-40°-CRI 90	10 W	BLACK
22041961-1241	CLD CELL-D-D	0.80	LED-893lm-3000K-40°-CRI 90	10 W	CHROME
22041910-1241	CLD CELL-D-D	0.80	LED-893lm-3000K-40°-CRI 90	10 W	WHITE
22041930-1241	CLD CELL-D-D	0.80	LED-893lm-3000K-40°-CRI 90	10 W	BLACK
22041960-1241	CLD CELL-D-D	0.80	LED-893lm-3000K-40°-CRI 90	10 W	CHROME
22041911-68	CLD CELL	0.80	LED-956lm-4000K-40°-CRI 90	10 W	WHITE
22041931-68	CLD CELL	0.80	LED-956lm-4000K-40°-CRI 90	10 W	BLACK
22041961-68	CLD CELL	0.80	LED-956lm-4000K-40°-CRI 90	10 W	CHROME
22041910-1213	CLD CELL-DI	0.80	LED-956lm-4000K-40°-CRI 90	10 W	WHITE
22041930-1213	CLD CELL-DI	0.80	LED-956lm-4000K-40°-CRI 90	10 W	BLACK
22041960-1213	CLD CELL-DI	0.80	LED-956lm-4000K-40°-CRI 90	10 W	CHROME
22041911-6841	CLD CELL-D-D	0.80	LED-956lm-4000K-40°-CRI 90	10 W	WHITE
22041931-6841	CLD CELL-D-D	0.80	LED-956lm-4000K-40°-CRI 90	10 W	BLACK
22041961-6841	CLD CELL-D-D	0.80	LED-956lm-4000K-40°-CRI 90	10 W	CHROME
22041910-6841	CLD CELL-D-D	0.80	LED-956lm-4000K-40°-CRI 90	10 W	WHITE
22041930-6841	CLD CELL-D-D	0.80	LED-956lm-4000K-40°-CRI 90	10 W	BLACK
22041960-6841	CLD CELL-D-D	0.80	LED-956lm-4000K-40°-CRI 90	10 W	CHROME

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated