


Elba - EM SA

Housing: vandal-resistant, self-extinguishing polycarbonate.
 Diffuser: made in polycarbonate.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.
 LED: high-efficiency light sources 2200lm - 24W - 4000K - CRI 80
 Power factor: 0.9
 Photobiological safety class: Exempt group.
 Luminous flux maintenance 70%: 50.000h (L70B50).
 22042310-09 EM 1H
 22042311-09 EM 3H



Code	Gear	Kg	Watt	Base	Lamps	Colour
22042310-09	CLD CELL-E	2.06	LED white	-	2200lm-4000K-CRI 80	WHITE
22042311-09	CLD CELL-E	2.25	LED white	-	2200lm-4000K-CRI 80	WHITE

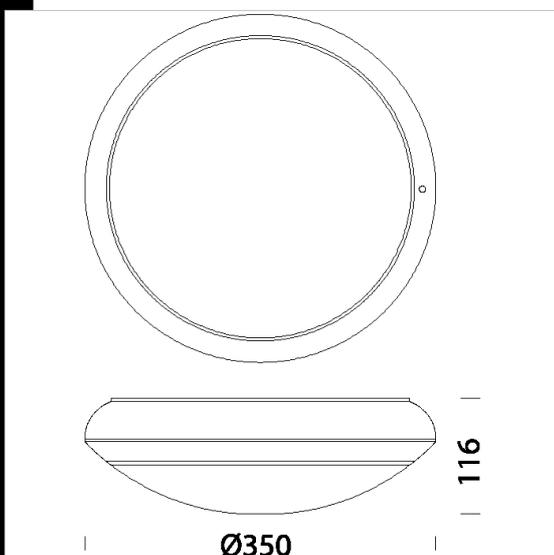

Download

DXF 2D
 - elba.dxf