

### Download


DXF 2D  
- tortuga.dxf

Montaggi  
- TORTUGA rev5.pdf



## Tortuga - Presence sensor ON-OFF

Housing: vandal-resistant, self-extinguishing polycarbonate. Diffuser: In clear polycarbonate, anti-dazzle, vandal resistant.  
Manufactured in accordance with EN 60598-CEI 34-21 standards. Degree of protection in accordance with EN 60529 standards.

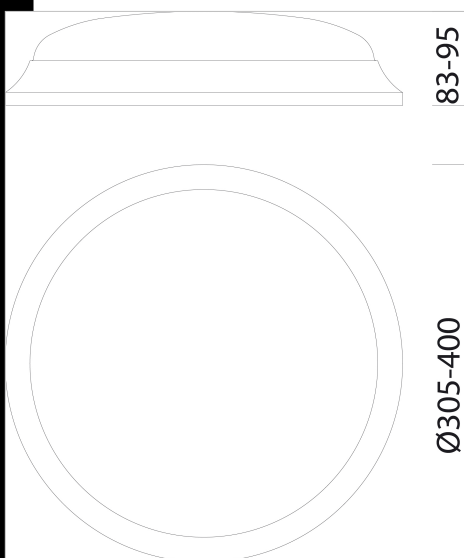

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22042410-19	CLD	0,71	LED-1368lm-3000K-CRI>80	17 W	WHITE
22042411-19	CLD	0,69	LED-1300K-4000K-CRI>80	17 W	WHITE
22042412-19	CLD	1,22	LED-2403lm-3000K-CRI>80	28 W	WHITE
22042413-19	CLD	1,21	LED-2614lm-4000K-CRI>80	28 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated