




Download

DXF 2D
- tortuga.dxf



Tortuga Centralized Em

Housing: vandal-resistant, self-extinguishing polycarbonate. Diffuser: In clear polycarbonate, anti-dazzle, vandal resistant.
EM version: with EM wiring with centralized power supply.
Manufactured in accordance with EN 60598-CEI 34-21 standards. Degree of protection in accordance with EN 60529 standards.

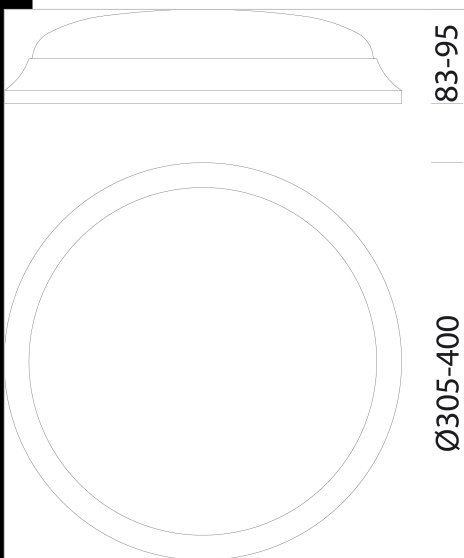

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22042410-0050	CLD-EC	0,65	LED-1368lm-3000K-CRI>80	17 W	WHITE
22042411-0050	CLD-EC	0,65	LED-1488lm-4000K-CRI>80	17 W	WHITE
22042412-0050	CLD-EC	1,10	LED-2403lm-3000K-CRI>80	28 W	WHITE
22042413-0050	CLD-EC	1,19	LED-2614lm-4000K-CRI>80	28 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated