


Download

DXF 2D
- past.dxf

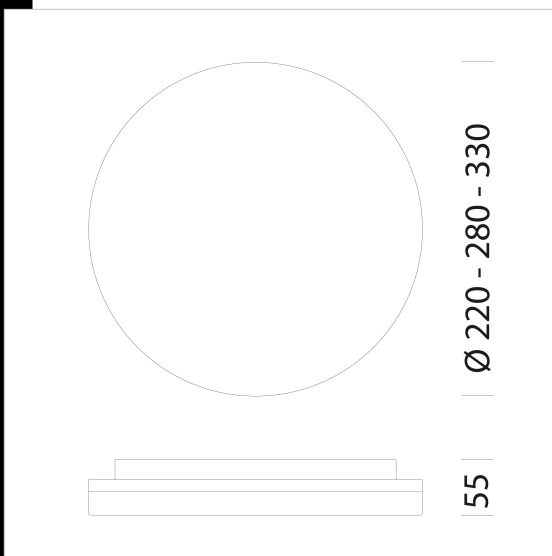

Pastilla - 100/240 V

Fixtures with or without radar sensor.
Housing: vandal-resistant, self-extinguishing polycarbonate. Diffuser: In clear polycarbonate, anti-dazzle, vandal resistant.
Power supply: AC100/240V.
Manufactured in accordance with EN 60598-CEI 34-21 standards. Degree of protection in accordance with EN 60529 standards.

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22042510-00	CLD CELL	0.53	LED-1328lm-3000K-CRI 80	15 W	BIANCO
22042511-00	CLD CELL	0.65	LED-1347-4000K-CRI 80	15 W	BIANCO
22042512-00	CLD CELL	0.77	LED-1651lm-3000K-CRI 80	18 W	BIANCO
22042513-00	CLD CELL	0.65	LED-1500lm-4000K-CRI 80	18 W	BIANCO
22042514-00	CLD CELL	1.01	LED-2050lm-3000K-CRI 80	24 W	BIANCO
22042515-00	CLD CELL	0.65	LED-1308lm-4000K-CRI 80	24 W	BIANCO
22042510-19	CLD CELL	0.60	LED-1328lm-3000K-CRI 80	15 W	BIANCO
22042511-19	CLD CELL	0.71	LED-1250lm-4000K-CRI 80	15 W	BIANCO
22042512-19	CLD CELL	0.71	LED-1651lm-3000K-CRI 80	18 W	BIANCO
22042513-19	CLD CELL	0.71	LED-1500lm-4000K-CRI 80	18 W	BIANCO
22042514-19	CLD CELL	1.05	LED-2273lm-3000K-CRI 80	24 W	BIANCO
22042515-19	CLD CELL	0.71	LED-2050lm-4000K-CRI 80	24 W	BIANCO

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated