

## Asso A - Medium

The lighting of indoor spaces must pace the attention on visual wellbeing, aesthetic quality and energy savings. The new LED sources allow high lighting levels and excellent colour rendering.

This is why Fosnova extended its range of top-sellers such as Asso, by adding versions with different sizes and adapters in order to adjust to different cable tracks, including versions with adjustable recessed spotlights, all fitting high-performance LEDs, a new technology that handles colour saturation in a more natural and homogenous manner. The brand new Asso spotlights prove to be perfect for all those spaces where reflexes, transparencies and the quality of whites and colours play a key role.

Each version of the fixture allows the highest light quality at a truly extraordinary colour performance (CRI 95). The range is complete and includes fixtures capable of fulfilling any interior lighting need. In a single body, you can use different optics and LEDs with different power outputs, keeping aesthetic continuity, despite differencing the amount of light: all these requirements make the fixture an excellent choice for retailing, architectural and museum lighting applications.

Housing: Die-cast aluminium with cooling holes.

Reflector: in die-cast polished aluminium, high efficiency and anti-glare.

Coating: Power-coated with a UV-resistant polyester paint.


Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.

LED: High-efficiency light sources (CRI 95).

Luminous flux maintenance L80B20: 50.000h.

Power factor >0.9

Photobiological safety class: Exempt group

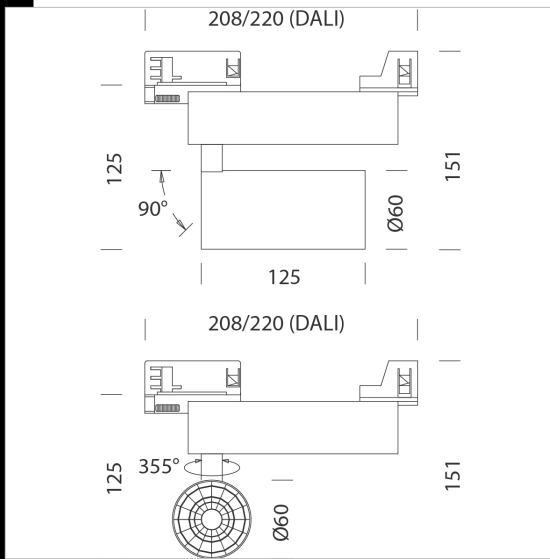

### Download

DXF 2D  
- aamedium.dxf

Montaggi  
- ASSO A-B REV3.pdf

BIM  
- Asso A - Medium - 20201005.zip

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22043110-00	CLD CELL	0,85	LED COB-2195lm-3000K-27°-CRI>95	22 W	WHITE
22043110-1241	CLD CELL-D-D	0,85	LED COB-2195lm-3000K-27°-CRI>95	22 W	WHITE
22043110-68	CLD CELL	0,82	LED COB-2349lm-4000K-27°-CRI>95	22 W	WHITE
22043110-6841	CLD CELL-D-D	0,85	LED COB-2349lm-4000K-27°-CRI>95	22 W	WHITE
22043130-00	CLD CELL	0,85	LED COB-2195lm-3000K-27°-CRI>95	22 W	BLACK
22043130-1241	CLD CELL-D-D	0,77	LED COB-2195lm-3000K-27°-CRI>95	22 W	BLACK
22043130-68	CLD CELL	0,99	LED COB-2349lm-4000K-27°-CRI>95	22 W	BLACK
22043130-6841	CLD CELL-D-D	0,99	LED COB-2349lm-4000K-27°-CRI>95	22 W	BLACK
22043112-00	CLD CELL	0,85	LED COB-2213lm-3000K-32°-CRI>95	22 W	WHITE
22043112-1241	CLD CELL-D-D	0,84	LED COB-2213lm-3000K-32°-CRI>95	22 W	WHITE
22043112-68	CLD CELL	0,84	LED COB-2368lm-4000K-32°-CRI>95	22 W	WHITE
22043112-6841	CLD CELL-D-D	0,85	LED COB-2368lm-4000K-32°-CRI>95	22 W	WHITE
22043132-00	CLD CELL	0,88	LED COB-2213lm-3000K-32°-CRI>95	22 W	BLACK
22043132-1241	CLD CELL-D-D	0,88	LED COB-2213lm-3000K-32°-CRI>95	22 W	BLACK
22043132-68	CLD CELL	0,82	LED COB-2368lm-4000K-32°-CRI>95	22 W	BLACK
22043132-6841	CLD CELL-D-D	0,88	LED COB-2368lm-4000K-32°-CRI>95	22 W	BLACK
22043114-00	CLD CELL	0,83	LED COB-2260lm-3000K-50°-CRI>95	22 W	WHITE
22043114-1241	CLD CELL-D-D	0,85	LED COB-2260lm-3000K-50°-CRI>95	22 W	WHITE
22043114-68	CLD CELL	0,83	LED COB-2418lm-4000K-50°-CRI>95	22 W	WHITE
22043114-6841	CLD CELL-D-D	0,83	LED COB-2418lm-4000K-50°-CRI>95	22 W	WHITE
22043134-00	CLD CELL	0,57	LED COB-2260lm-3000K-50°-CRI>95	22 W	BLACK
22043134-1241	CLD CELL-D-D	0,99	LED COB-2260lm-3000K-50°-CRI>95	22 W	BLACK
22043134-68	CLD CELL	0,57	LED COB-2418lm-4000K-50°-CRI>95	22 W	BLACK
22043134-6841	CLD CELL-D-D	0,99	LED COB-2418lm-4000K-50°-CRI>95	22 W	BLACK

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated