

Colour is a key factor in enticing consumers to buy. Therefore the lighting of points of sale must improve the viewing of the wares on display. This result can be obtained only with wide-beam light sources capable of ensuring a correct viewing of colours.

Fashion is created to satisfy the lighting needs of showrooms and every other space requiring accent lighting.

Housing: in die-cast aluminium.

Version with reflector: in die-cast

Version with reflector in die cast polished aluminium, high efficiency and anti glare.

Coating

Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degrees of protection in accordance with EN60529 standards.

high-efficiency light sources (CRI 95).


Luminous flux maintenance L80B20: 50.000h. Power factor >0.9

Photobiological safety class: Exempt group

The high-performance Vivid LED series was designed with a new technology that ensures uniform colour saturation.

This is why these lamps are particularly suited in settings where reflections, transparencies, good colour and white quality are very important.

On request: CLD CELLD-DIG (DALI) version with sub-code -1241. Version complete with concealed adapter and built-in dimmable driver to be used with OMNITRACK PLUS track-mounted system.

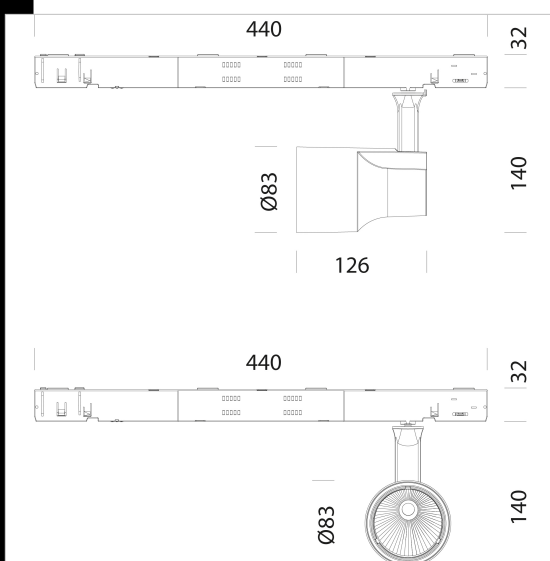

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22044210-00	CLD CELL	0.69	LED COB VIVID-1415lm-3000K-34°-CRI>95	19 W	WHITE
22044211-00	CLD CELL	0.70	LED COB VIVID-1572lm-4000K-34°-CRI>95	19 W	WHITE
22044230-00	CLD CELL	0.68	LED COB VIVID-1415lm-3000K-34°-CRI>95	19 W	BLACK
22044231-00	CLD CELL	0.68	LED COB VIVID-1572lm-4000K-34°-CRI>95	19 W	BLACK
22044210-1241	CLD CELL-D-D	0.71	LED COB VIVID-1415lm-3000K-34°-CRI>95	19 W	WHITE
22044211-1241	CLD CELL-D-D	0.72	LED COB VIVID-1572lm-4000K-34°-CRI>95	19 W	WHITE
22044230-1241	CLD CELL-D-D	0.68	LED COB VIVID-1415lm-3000K-34°-CRI>95	19 W	BLACK
22044231-1241	CLD CELL-D-D	0.68	LED COB VIVID-1572lm-4000K-34°-CRI>95	19 W	BLACK

29/04/2021