

Download

DXF 2D
- fashionl2.dxf

Montaggi
- FASHION rev2.pdf



Fashion L2 with lens

Colour is a key factor in enticing consumers to buy. Therefore the lighting of points of sale must improve the viewing of the wares on display. This result can be obtained only with wide-beam light sources capable of ensuring a correct viewing of colours.

Fashion is created to satisfy the lighting needs of showrooms and every other space requiring accent lighting.

Housing: in die-cast aluminium.

Version with lens: in PMMA with high efficiency output and very low glare rate

Coating: power-coated with a UV-resistant polyester epoxy paint.

Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degrees of protection in accordance with EN60529 standards.


high-efficiency light sources (CRI 95).

Luminous flux maintenance L80B20: 50.000h. Power factor >0.9

Photobiological safety class: Exempt group

The high- performance Vivid LED series was designed with a new technology that ensures uniform colour saturation.

This is why these lamps are particularly suited in settings where reflections, transparencies, good colour and white quality are very important.

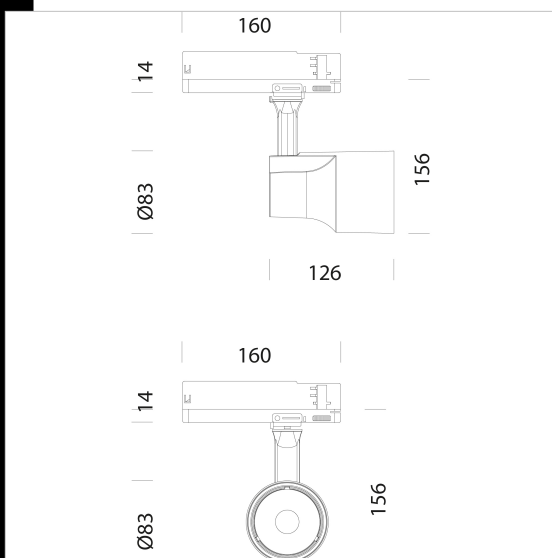

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22044710-00	CLD CELL	0.68	LED COB-2136lm-3000K-13°-CRI 95	25 W	WHITE
22044711-00	CLD CELL	0.63	LED COB-2306lm-4000K-13°-CRI 95	25 W	WHITE
22044712-00	CLD CELL	0.69	LED COB-2087lm-3000K-24°-CRI 95	25 W	WHITE
22044713-00	CLD CELL	0.68	LED COB-2254lm-4000K-24°-CRI 95	25 W	WHITE
22044730-00	CLD CELL	0.70	LED COB-2136lm-3000K-13°-CRI>95	25 W	BLACK
22044731-00	CLD CELL	0.79	LED COB-2306lm-4000K-13°-CRI>95	25 W	BLACK
22044732-00	CLD CELL	0.67	LED COB-2087lm-3000K-24°-CRI>95	25 W	BLACK
22044733-00	CLD CELL	0.69	LED COB-2254lm-4000K-24°-CRI>95	25 W	BLACK
22044710-1241	CLD CELL-D-D	0.73	LED COB-2136lm-3000K-13°-CRI>95	25 W	WHITE
22044711-1241	CLD CELL-D-D	0.82	LED COB-2306lm-4000K-13°-CRI>95	25 W	WHITE
22044712-1241	CLD CELL-D-D	0.69	LED COB-2087lm-3000K-24°-CRI>95	25 W	WHITE
22044713-1241	CLD CELL-D-D	1.00	LED COB-2254lm-4000K-24°-CRI>95	25 W	WHITE
22044730-1241	CLD CELL-D-D	0.68	LED COB-2136lm-3000K-13°-CRI>95	25 W	BLACK
22044731-1241	CLD CELL-D-D	0.68	LED COB-2306lm-4000K-13°-CRI>95	25 W	BLACK
22044732-1241	CLD CELL-D-D	0.69	LED COB-2087lm-3000K-24°-CRI>95	25 W	BLACK
22044733-1241	CLD CELL-D-D	0.68	LED COB-2254lm-4000K-24°-CRI>95	25 W	BLACK

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated