




Stilo BL - 3x - suspension

Housing : in aluminium.
Luminous flux maintenance 80%: 50000h (L80B20). Regulations: manufactured in compliance with EN 60598-1-CEI 34.21 standards, protection level according to EN 60529 standards.

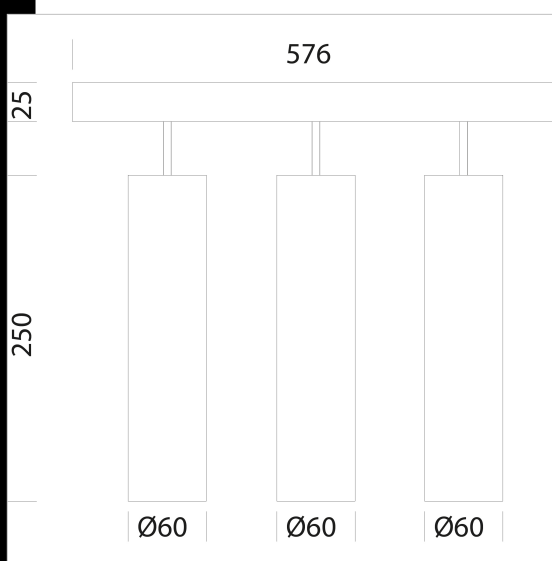

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22045510-00	CLD	0,75	LED3x-893lm-3000K-40°-CRI 90	30 W	WHITE
22045530-00	CLD	0,60	LED3x-893lm-3000K-40°-CRI 90	36 W	BLACK
22045560-00	CLD	2,95	LED3x-893lm-3000K-40°-CRI 90	36 W	CHROME
22045410-00	CLD-DI	0,60	LED3x-893lm-3000K-40°-CRI 90	30 W	WHITE
22045430-00	CLD-DI	0,60	LED3x-893lm-3000K-40°-CRI 90	36 W	BLACK
22045460-00	CLD-DI	0,60	LED3x-893lm-3000K-40°-CRI 90	36 W	CHROME
22045510-1241	CLD CELL-D-D	2,95	LED3x-893lm-3000K-40°-CRI 90	30 W	WHITE
22045530-1241	CLD CELL-D-D	2,95	LED3x-893lm-3000K-40°-CRI 90	30 W	BLACK
22045560-1241	CLD CELL-D-D	2,95	LED3x-893lm-3000K-40°-CRI 90	30 W	CHROME
22045410-1241	CLD CELL-D-D	2,95	LED3x-893lm-3000K-40°-CRI 90	30 W	WHITE
22045430-1241	CLD CELL-D-D	2,95	LED3x-893lm-3000K-40°-CRI 90	30 W	BLACK
22045460-1241	CLD CELL-D-D	2,95	LED3x-893lm-3000K-40°-CRI 90	30 W	CHROME
22045510-68	CLD CELL	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	WHITE
22045530-68	CLD CELL	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	BLACK
22045560-68	CLD CELL	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	CHROME
22045410-1213	CLD CELL-DI	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	WHITE
22045430-1213	CLD CELL-DI	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	BLACK
22045460-1213	CLD CELL-DI	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	CHROME
22045510-6841	CLD CELL-D-D	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	WHITE
22045530-6841	CLD CELL-D-D	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	BLACK
22045560-6841	CLD CELL-D-D	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	CHROME
22045410-6841	CLD CELL-D-D	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	WHITE
22045430-6841	CLD CELL-D-D	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	BLACK
22045460-6841	CLD CELL-D-D	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	CHROME

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated