

King outer wall

King is wall mounted floodlight designed to provide a solution to the lighting of environments requiring a high degree of protection.

Housing: Adjustable-angle, made of die-cast aluminium.

Reflector: High-performance oxidised and polished aluminium.

Diffuser: Tempered glass protection shield.

Coating: Humidity-resistant acrylic-resin liquid paint, UV-stabilised.


Lampholder: Ceramic with silver-plated contacts, or polycarbonate with phosphor bronze contacts.

Electric gear: 230V/50Hz power supply. Flexible silicone insulated wire terminated with admiralty brass clamps, with fibreglass braid, cross-section: 1.5 sqmm. 2P+T terminal block (with plug-socket connector).

Standard supply: Includes adjustable steel bracket. Hinge opening of the glass holding ring for easier maintenance.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Lamps: halogen, compact fluorescent energy-saving lamps included.

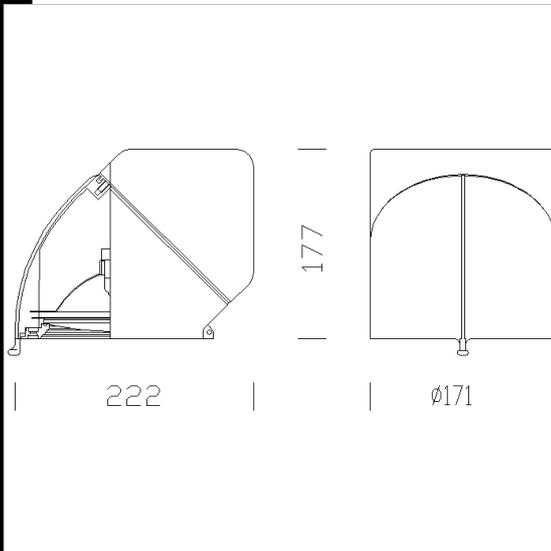

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22049418-00	CNR-L	2.80	FLC 1x13D-900lm-3000K-Ra 1b	17 W	G24d-1	WHITE
22049473-00	CNR-L	2.55	ALO 70-1100lm-3000K-Ra 100	75 W	E27	SILVER
22049472-00	CNR-L	2.80	FLC 1x13D-900lm-3000K-Ra 1b	17 W	G24d-1	SILVER
22049419-00	CNR-L	2.55	ALO 70-1100lm-3000K-Ra 100	75 W	E27	WHITE

Accessories



- Conveyo rmm. 165



- Glass + frame

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated