


Download
DXF 2D
- anello.dxf



Anello

Housing: in aluminum, complete with DIMM power cable.
Diffuser: polycarbonate.
LED: luminous flux maintenance 80%: 50.000h (L80B20).

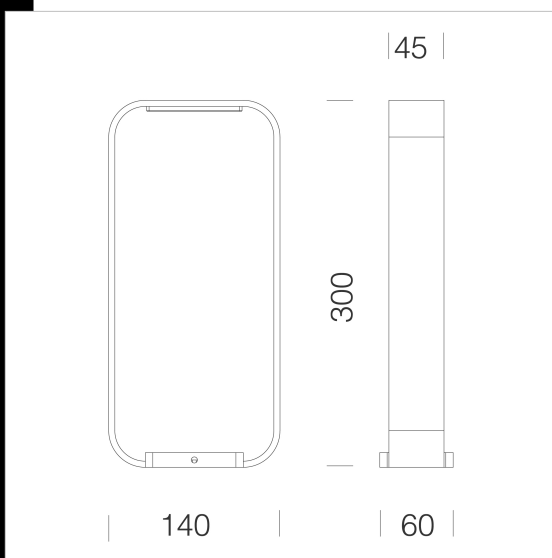

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22051110-00	CLD	1,00	LED-290lm-3000K-CRI>90	6 W	WHITE
22051130-00	CLD	1,00	LED-290lm-3000K-CRI>90	6 W	BLACK
22051170-00	CLD	1,00	LED-290lm-3000K-CRI>90	6 W	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated