



## Ceiling Cubic

Housing: Coloured glass with an aluminium structure holding the terminal block and the brackets for recessed mounting.


Lampholder: Ceramic with silver-plated contacts.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

### Download

DXF 2D  
- 60115.dxf

Montaggi  
- CUBIC 07-07.pdf

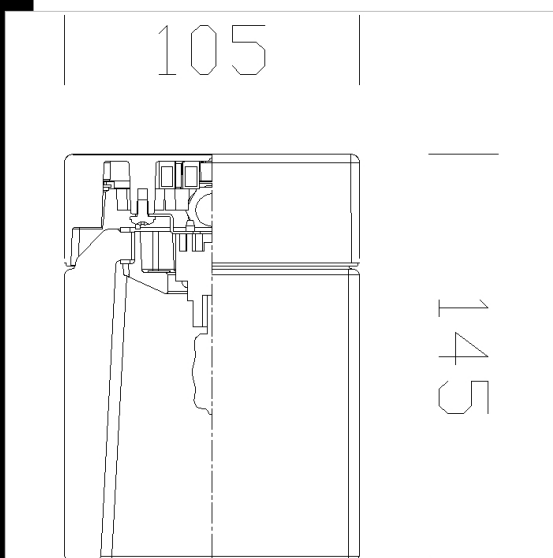

Code	Gear	Kg	WTot	Colour
22060112-00	CLD CELL	2.00	4 W	BIANCO
22060175-00	CLD CELL	2.00	5 W	ARGENTO

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated