


Cubic Wall mounting

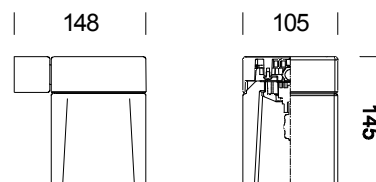

Code	Gear	Kg	Colour	Dimensions	lamp
22060210-00	S	2.20	white		ALO max 60-G9
22060231-00	S	2.20	marine water	148x105x145	ALO max 60-G9
22060282-00	S	2.20	blue	148x105x145	ALO max 60-G9
22060293-00	S	2.20	amber	148x105x145	ALO max 60-G9
22060244-00	S	2.20	green	145x105x148	ALO max 60-G9
22060226-00	S	2.20	Pink	148x105x145	ALO max 60-G9
22060257-00	S	2.20	yellow	148x105x145	ALO max 60-G9
22060263-00	S	2.20	light blue	148x105x145	ALO max 60-G9
22060211-00	S	2.20	white	148x105x145	INC max 60-E14
22060232-00	S	2.20	marine water	148x105x145	INC max 60-E14
22060283-00	S	2.20	blue	148x105x145	INC max 60-E14
22060294-00	S	2.20	amber	148x105x145	INC max 60-E14
22060245-00	S	2.20	green	148x105x145	INC max 60-E14
22060227-00	S	2.20	Pink	148x105x145	INC max 60-E14
22060258-00	S	2.20	yellow	148x105x145	INC max 60-E14
22060264-00	S	2.20	light blue	148x105x145	INC max 60-E14
22060270-00	S	2.20	grey	145x105x145	ALO max 60-GU10
22060273-00	S	2.20	grey	145x105x145	INC max 60-E14

Housing: die-cast aluminium, powder painted using acrylic resin based paint resistant to UV rays, previously subjected to chromium-plating. Wall-mounted versions with diffuser positionable at 350°.

Diffuser: shockproof, pressed crystal glass. Coloured versions with sand blasted and liquid painted crystal using paints that withstand high temperatures.

Equipment: fitting supplied without lamps.

Wiring: using Teflon wires resistant to high temperatures; network connecting terminals with maximum permitted cross-section of the conductors of 2.5 mm².

Standards: products compliant with applicable CEI 34-21, CEI EN 60598-1, CEI EN 60598-2-1 standards.